



p.c.b. layout

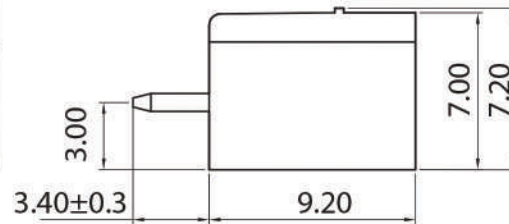

Approvals

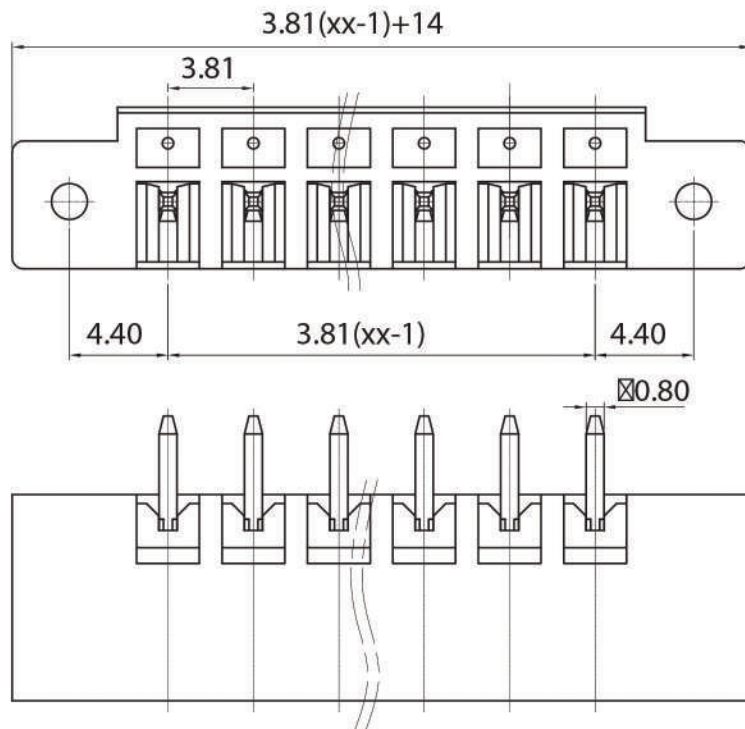

8 A-300V

7 A-250V

Electrical

Rated voltage	250V
Rated current	7A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V1 min
Wire range	

Torque	
Temp. Range	-40°C+105°C
Stripping lenght	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	3.81 mm
Poles	02÷22

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, tin plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CCM	02÷22	-3.81	-VF		

Version Date

01/20	17/07/2020
-------	------------