

Approvals



10A-300V

Electrical

Rated voltage	130V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC200V/1 min
Wire range	28-14AWG 1,5mm ²

Torque	
Temp. Range	-40°C+105°C
Stripping length	8 mm
Max sold. time	

Dimensions

Pitch	3,81mm
Poles	2÷24

Material


Housing	PA66 UL94V0
Pin	Copper Alloy, tin plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	Stainless Steel

General description of ordering code




Series	n. Poles	Pitch	Version	Color	Custom
CFP1	02÷24	-3.81	-EJ		

Version Date

01/17 20/04/17

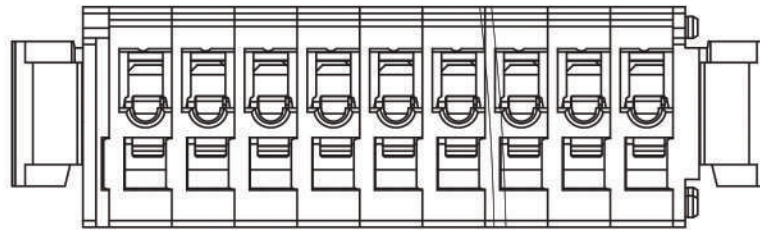

3.81XX+11.8(REF)

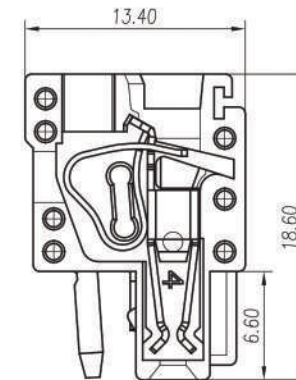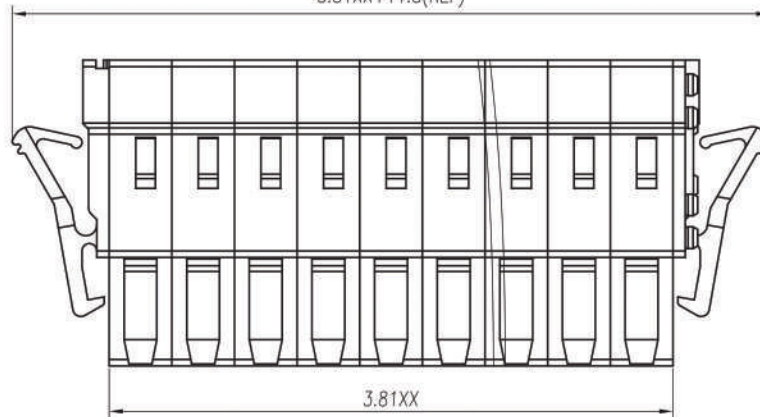

3.81

