

### Approvals



15A-300V

### Electrical

Rated voltage 250V  
 Rated current 12A  
 Contact resistance 20mΩ  
 Insulation resistance 500MΩ/DC500V  
 Withstanding voltage AC2000V/1 min  
 Wire range 28-12AWG 2,5 mm<sup>2</sup>

Torque  
 Temp. Range -40°C+105°C  
 Stripping length 8 mm  
 Max sold. time

### Dimensions

Pitch 5.08 mm  
 Poles 2÷24

### Material


Housing PA66 UL94V0  
 Pin Copper alloy, tin plated  
 Cage  
 Screws  
 Side Block  
 Nut screw  
 Clamp Stainless Steel

### General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP1	02÷24	-5.08	-SEJ-		

### Version Date

01/18 07/02/18

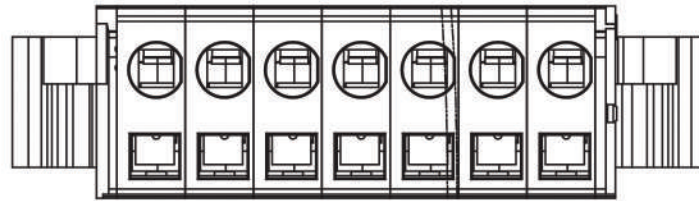

5.08XX+16.1(REF)

