

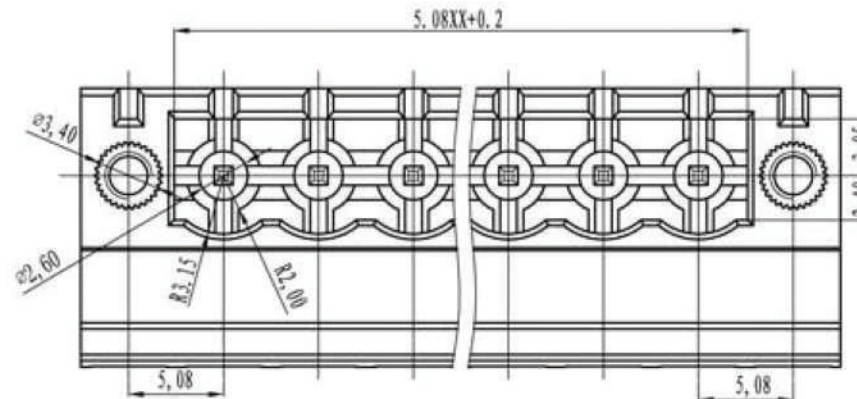
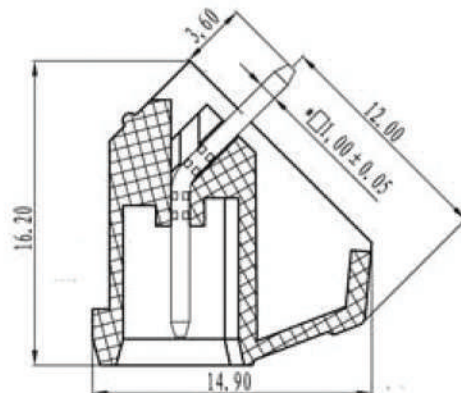


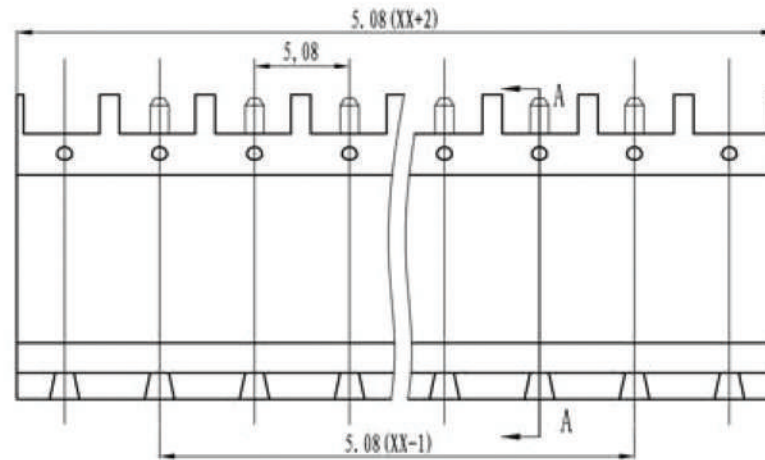

CÉLION

product specification

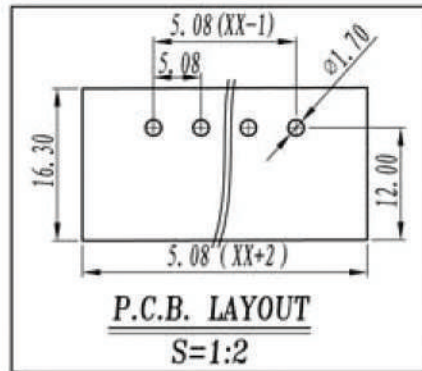

Approvals

UL-cUL Not approved
VDE Not approved

Electrical

Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1 Min	

Mechanical

Temp. Range -40°C + 105°C
Max sold. Time +250°C, for 5 sec.

Dimensions

Pitch 5.08 mm
Poles 2+22

Material

Housing PA66, UL94V0
Pin header Brass, tin plated
Nut screw M2.5 Brass

Versione/Version 2014-1
Data/Date 28/04/2014


General description of ordering code

Series	n. poles	pitch	version	color	custom
CMI	2+22	5.08	F		

UNITS: mm SIZE: A4



THIRD ANGLE PROJECTION



CMI-5.08-F