




# CÉLION

product specification

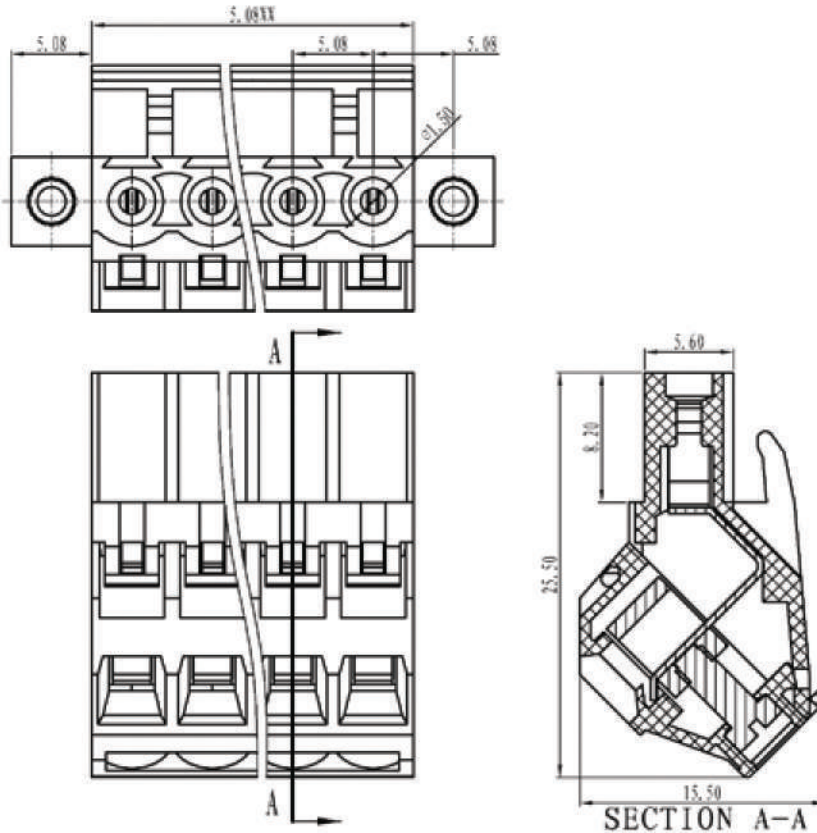

## Electrical

Standard: UL-IEC  
 Rated voltage: 250V-320V  
 Rated current: 10A-20A  
 Contact resistance: 20m  $\Omega$   
 Wire range: 24-12AWG 2.5mm<sup>2</sup>  
 Withstanding voltage: AC2000V/1Min  
 Insulation resistance: 5000M  $\Omega$ /DC1000V

## Mechanical

Temp. Range: -40°C~+105°C  
 Torque: 0.4Nm (3.5Lb'in)  
 Strip length: 7mm

## Dimensions

Pitch: 5.08mm  
 Poles: xpx

## Material

Housing: PA66, UL94V-0  
 Screws: M2.5, steel Zinc plated  
 Wire guard: Brass, Ni plated  
 Clamp: Phosphor bronze, Ni plated

Schema generale del codice di ordinazione / General description of ordering code

serie	n°poli	passo	versione	colore	custom
CRI	2/24	5.08	F		

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	short angle sid				≡	—	□	//	⊥		
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	to 10	to 10	to 30'	to 20'						to 10'	to 5
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
					NAME	CRI-5.08-F