

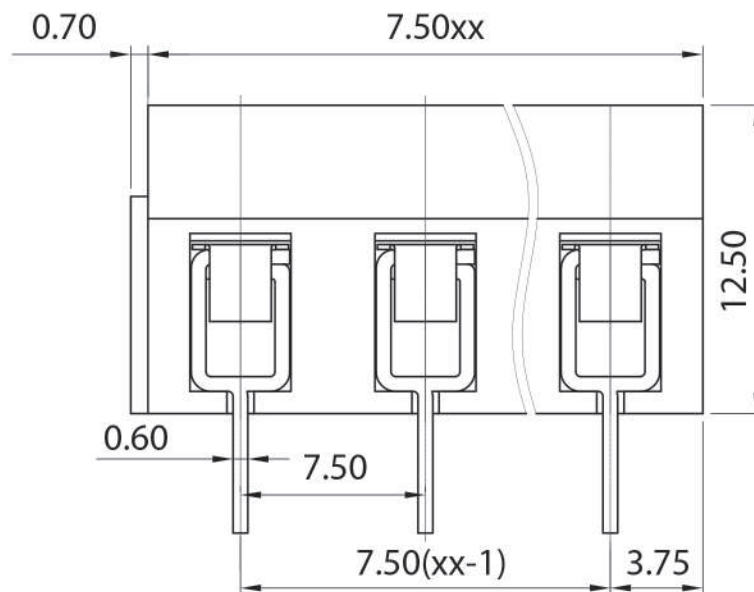


p.c.b. layout

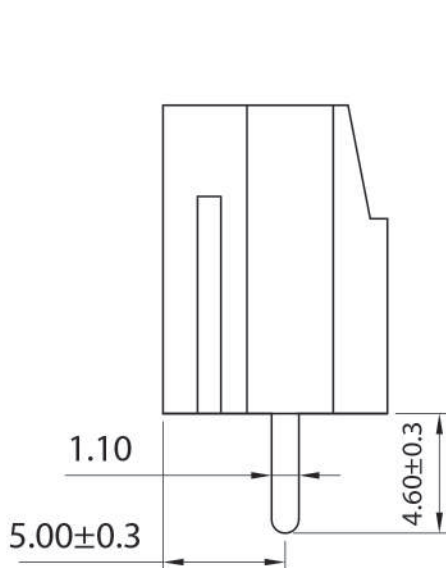

## Approvals

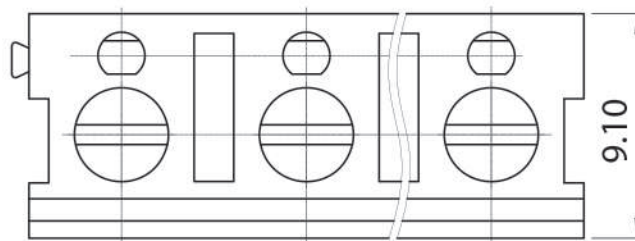

16A-250V

not approved

## Electrical

Rated voltage	450V
Rated current	24A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Impulse voltage	1.6KV
Wire range	2,5mm2 22÷14 AWG

Torque	0,5Nm (4.5Lb In)
Temp. Range	-40°C + 105°C
Stripping lenght	5 mm
Max sold. time	+250°C for 5 sec.

## Dimensions

Pitch	7,50 mm
Poles	2÷24

## Material

Housing	PA66,UL94V0
Pin	Copper Alloy, Sn plated
Cage	Copper Alloy, Ni plated
Screws	M3; Steel Zn plated
Side Block	---
Nut screw	---
Clamp	---

## General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MLR72	2÷24	-7.5	-V		

## Version Date

2020/01

13/11/2020