

Approvals



Electrical

Rated voltage	300V
Rated current	15A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1min
Wire range	28-12 AWG 2,5mm ²

Torque	
Temp. Range	-40°C +105°C
Stripping lenght	5 mm
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	5 mm
Poles	2÷24


Material

Housing	PA66 UL94V0
Pin	Copper Alloy, Sn plated
Cage	Stainless steel
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MRM6	2÷24	-5	-V		

Version	Date
19/01	09/10/19

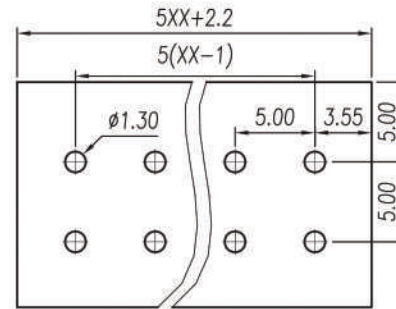

p.c.b. layout

