

Approvals



30A-300V
not approved

Electrical

Rated voltage 400V
Rated current 32A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC2000V/1 min
Wire range 26-10AWG 4mm²

Torque 0,5Nm(4.4Lbin)
Temp. Range -40°C+105°C
Stripping length 6mm
Max sold. time +250°C for 5 sec

Dimensions

Pitch 6,35mm
Poles 2±24

Material


Housing PA66UL94V0
Pin Copper Alloy, Sn plated
Cage Copper Alloy, Ni plated
Screws M3 Steel, Zn plated
Side Block
Nut screw
Clamp

General description of ordering code




Series	n. Poles	Pitch	Version	Color	Custom
MRS64	2±24	-6.35	-V		

Version Date

01/17 09/10/17

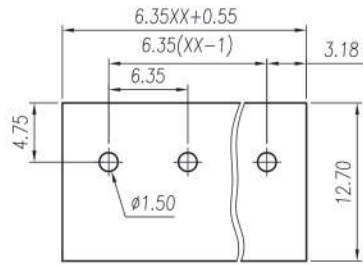

P.C.B. LAYOUT

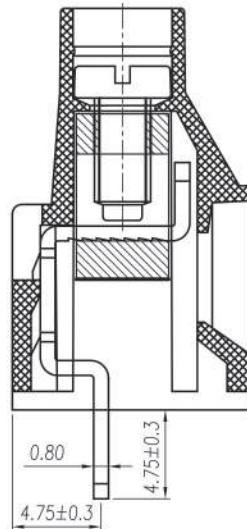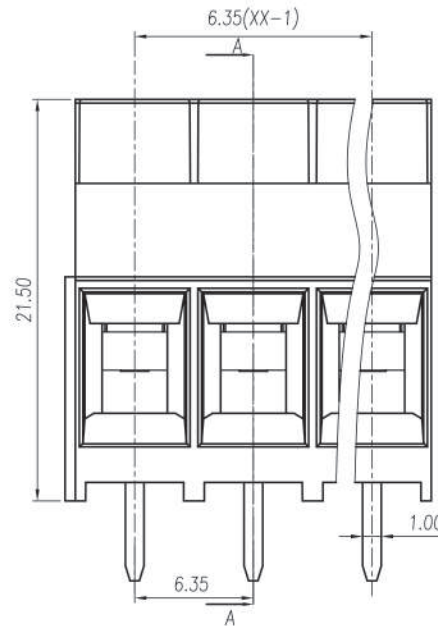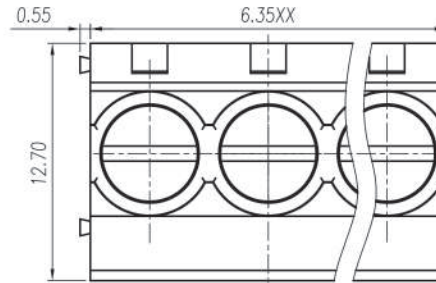

SECTION:A-A