

# PIN HEADER DIP DUAL ROW DOUBLE PLASTIC


## 12 SERIES. 2.54MM PITCH



Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

### Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds  
260° for 5 seconds

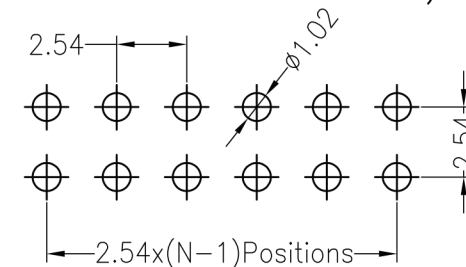

### Ordering Information

**12(H)D - 22 (XX) - AAA - B C P (1)**

1 2 3 4 5 6 7

#### 1. Connector Series

#### 2. (H) Hauteur isolant

- H = 15 (Hauteur isolant : 1.5mm)
- H = 25 (Hauteur isolant : 2.5mm)

#### 3. Number of pins per row

#### 4. Pin Length

#### 5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

#### 6. Contact Plating




- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin
- H = 3U" Gold\*

#### 7. Post

- W (With Post)
- Ø (No Post)

#### (1). Packaging

Ø = PE Bag 1= Tray 2= Tube

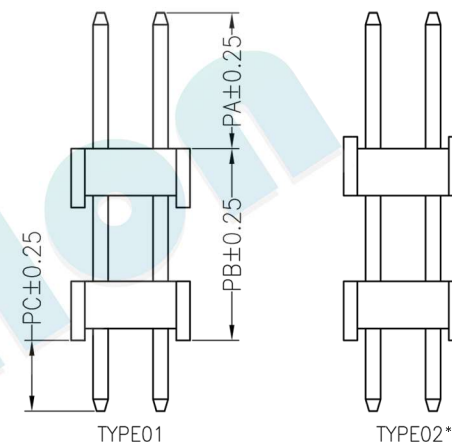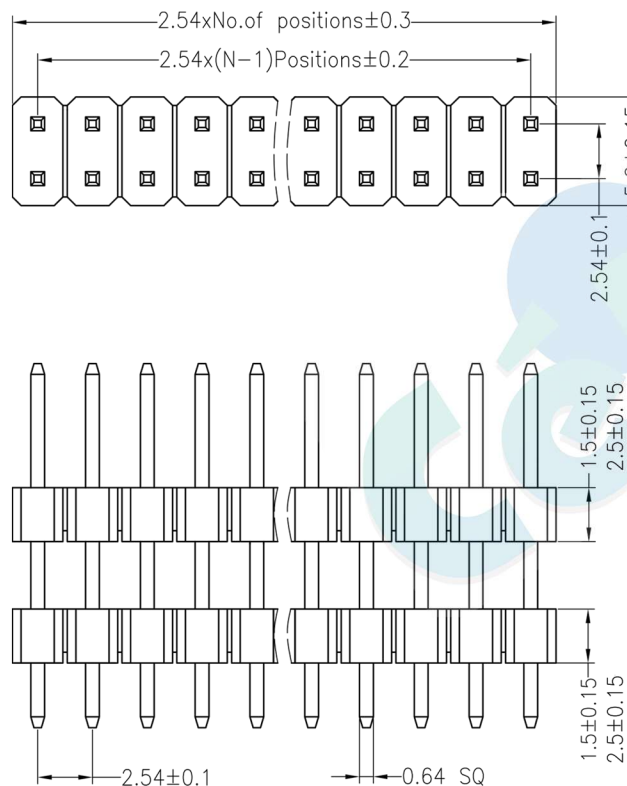

\*Uniquement pour le "1215D"

Dimension antitheses list 1215				
ITEM	PA	PB	PC	L
Standard	6.00	3.00	3.00	12.0
Alternate				

Dimension antitheses list 1225				
ITEM	PA	PB	PC	L
Standard	6.00	5.00	3.00	14.0
Alternate				

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	 votre partenaire en électronique				
				X.X	±0.30				UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.				12XXD - 22XX - XXX - XXX (1)	
				X.XXX	±0.10			SHEET	1/1					TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE		PROJ.	◆						
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL										