

PIN HEADER DIP RIGHT ANGLE QUAD ROW

13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Ordering Information

1320DR - 14 (XX) - AAA - B C P (1)

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 20 (Hauteur isolant : 2.0mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating




- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F=Gold Flash/Tin
- G= Tin

7. Post



- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2=Tube 3=Tube+Cap 4=Reel+Cap

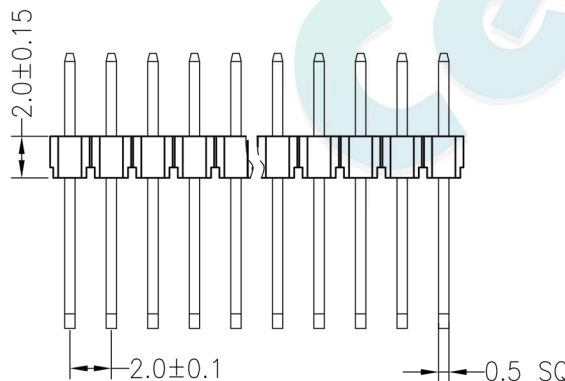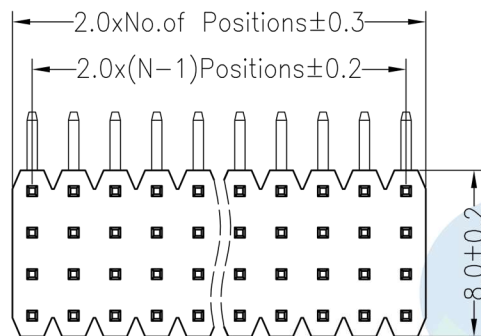

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

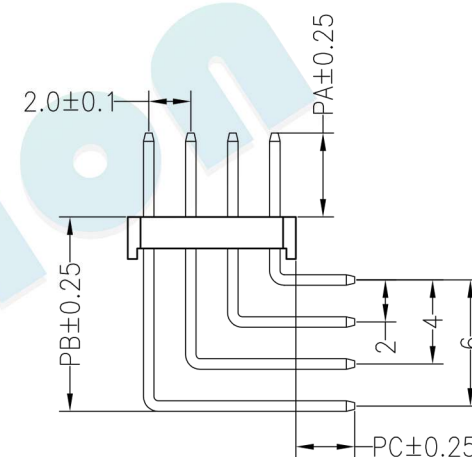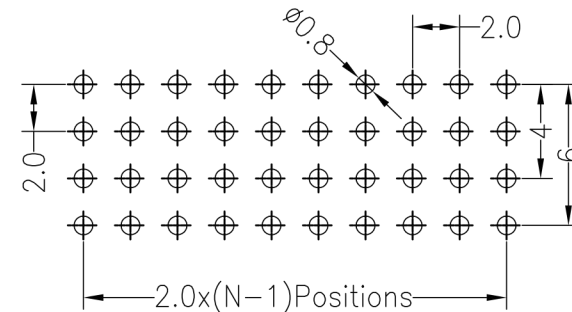

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	8.60	2.80	9.90/13.9/17.9/21.9
Alternate				

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

YiYuSheng

12.03.28

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

CHECK

APPROVE

PART NO. 1320DR - 14XX - XXX - XXX

TITLE: 2.0PH 4xNpin H2.0mm 90°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	