

PIN HEADER SMT RIGHT ANGLE SINGLE ROW


13 SERIES. 2.00MM PITCH



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DIC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

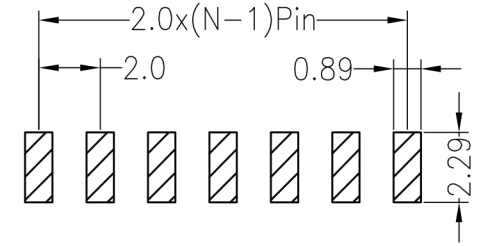

Ordering Information

1320SR - 11 (XX) - AAA - B C D (1)

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 20(Hauteur isolant : 2.0mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating




- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap

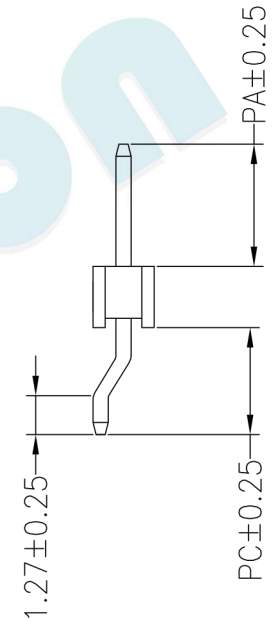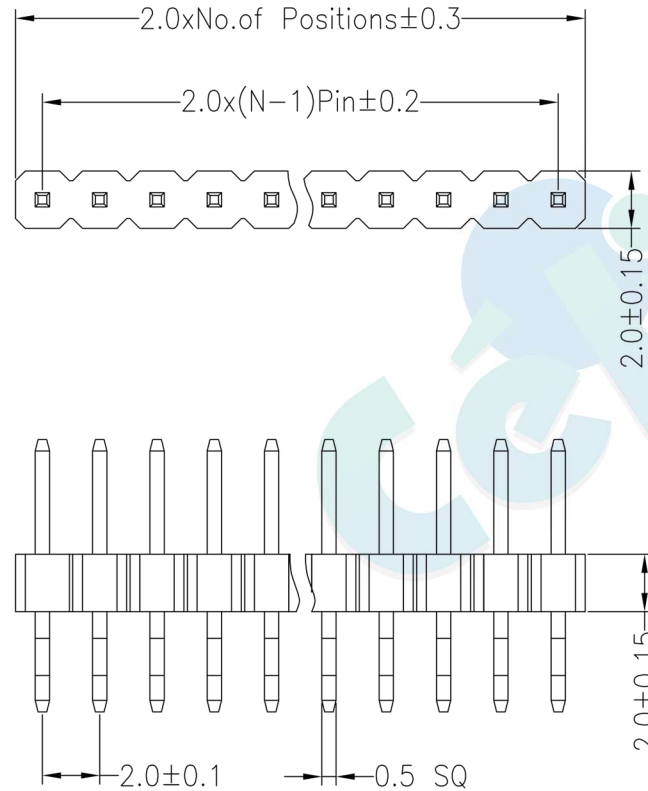

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.80	9.00
Alternate			

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

BEN

12.04.11

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

PART NO.

TITLE:



1320SR - 11XX - XXX - XXX

2.0PH 1xNpin H2.0mm Single 90°SMT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	

OPERATION	DRAW	BEN	12.04.11	SCALE	FIT	PART NO.	TITLE:
X.X ±0.30				mm		1320SR - 11XX - XXX - XXX	2.0PH 1xNpin H2.0mm Single 90°SMT
X.XX ±0.20				A4			
X.XXX ±0.10				1/1			
Angle ±3°							
DIM TOL							