

PIN HEADER SMT RIGHT ANGLE DUAL ROW


13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

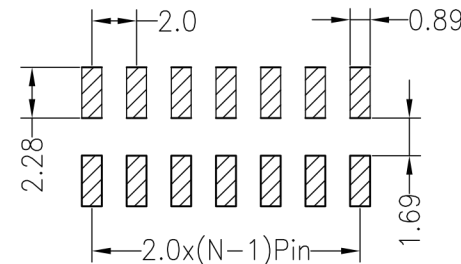

Ordering Information

1320SR - 12 (XX) - AAA - B C P (1)

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 20(Hauteur isolant : 2.0mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T
- F = BK-LCP

6. Contact Plating



- A = Gold Flash
- B = 1U" Gold
- C = 1.5U" Gold
- D = 2U" Gold
- E = 3U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Pe 4=Tape&Reel 5=Tube&Reel

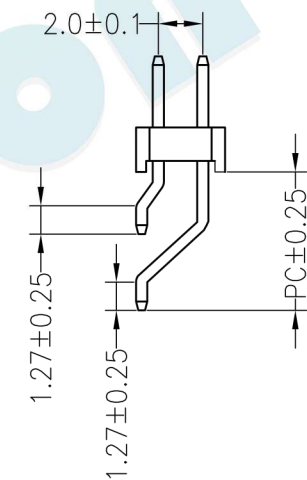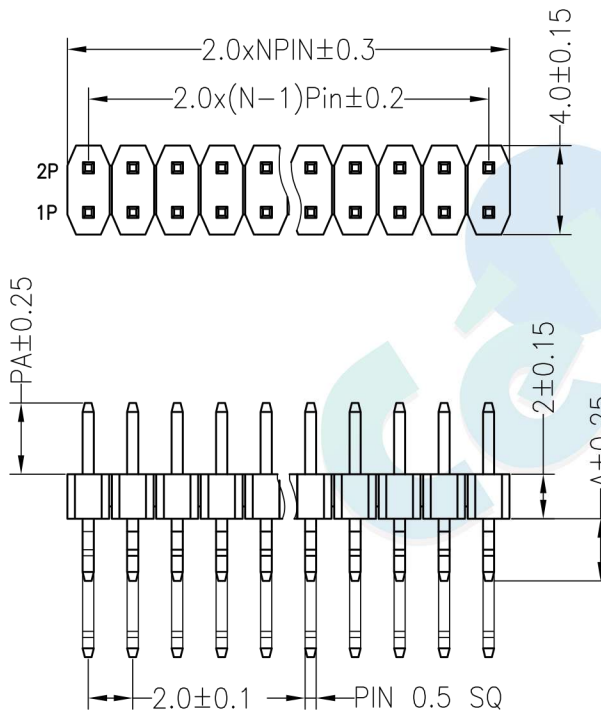

Dimension antitheses list					
ITEM	PA	A	PC	L短	L长
Standard	4.00	3.40	6.60	9.50	13.50
Alternate					

				OPERATION		DRAW	BEN	12.04.11	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	APPROVE			SIZE	A4	PART NO.	1320SR - 12XX - XXX - XXX
				X.XXX	±0.10							
A0	2012.04.11	NEW DRAWING		Angle	±3°	PROJ.			TITLE:		2.0PH 2xNpin H2.00mm 90° SMT	
REV	DATE	MODIFICATION	DESCRIPTION	DIM	TOL							