

PIN HEADER DIP DUAL ROW DOUBLE PLASTIC


13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

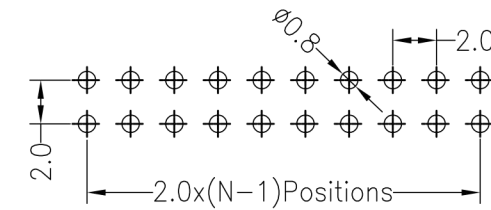

Ordering Information

1315D - 22 (XX) - AAA - B C P (1)

1. Connector Series

2. (H) Hauteur isolant

- H = 15(Hauteur isolant : 1.5mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating





- A = 0.8" Gold
- B = 1U" Gold
- C = 1.5U" Gold
- D = 2U" Gold
- H = 3U" Gold
- I = Gold Flash/Tin
- J = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2= Tube 3=Tube+Cap 4=Reel+Cap
5=Reel+Mylar

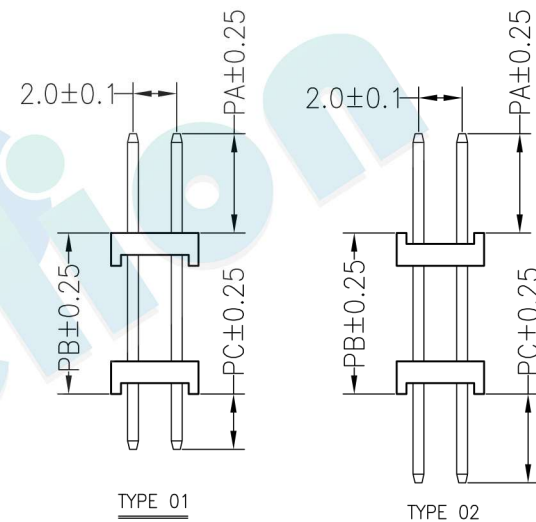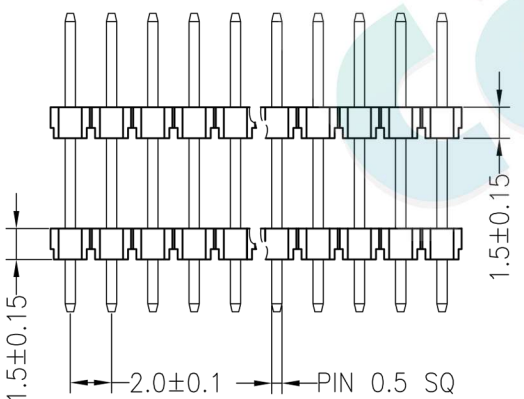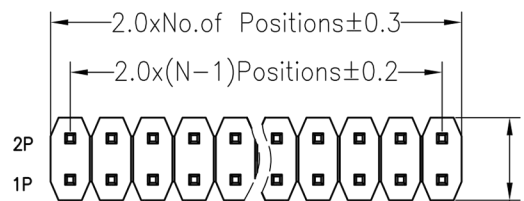

Dimension antitheses list					
ITEM	PA	PB	PC	L	type
Alternate					type01

OPERATION	DRAW	YiYuSheng	12.03.28	SCALE	FIT
X.X ±0.30	CHECK			UNIT	mm
X.XX ±0.20				SIZE	A4
X.XXX ±0.10				SHEET	1/1
Angle ±3°	APPROVE			PROJ.	◆
DIM TOL					



A0	2012.03.28	NEW DRAWING		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	

PART NO.	1315D - 22XX - XXX - XXX
TITLE:	2.0PH 2xNpin 2+H1.5mm 180°

PIN HEADER DIP DUAL ROW DOUBLE PLASTIC

13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Ordering Information

1320D - 22 (XX) - AAA - B C P (1)

1 2
3
4
5
6
7

1. Connector Series

2. (H) Hauteur isolant

- H = 20(Hauteur isolant : 2.0mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating


- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post





- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2= Tube



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

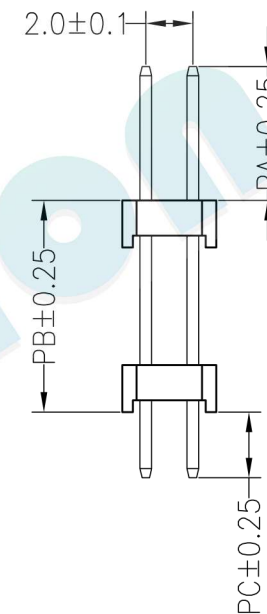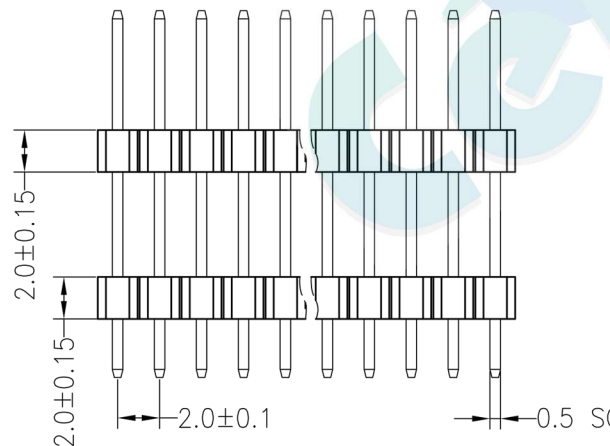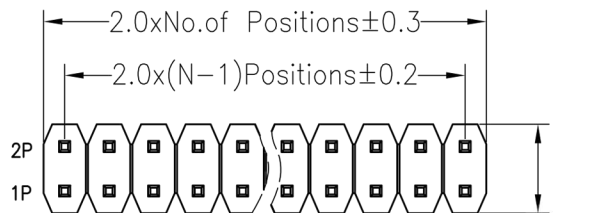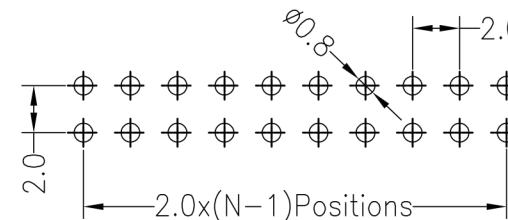

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	4.00	2.80	10.80
Alternate				

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	APPROVE			SIZE	A4	PART NO.	1320D - 22XX - XXX - XXX
				X.XXX	±0.10							
A0	2012.03.28	NEW DRAWING		Angle	±3°	PROJ.						
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							