

PIN HEADER DIP RIGHT ANGLE SINGLE ROW


13 SERIES 2.00MM PITCH



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

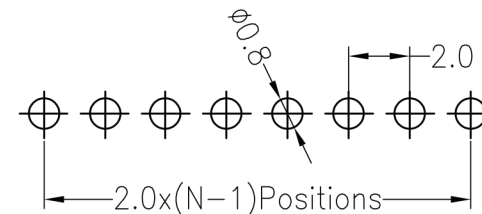

Ordering Information

13(H)DR - 11 (XX) - AAA - B C P (1)

1. Connector Series

2. (H) Hauteur isolant

- H = 10 (Hauteur isolant : 1.0mm)
- H = 15 (Hauteur isolant : 1.5mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating




- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2=Tube

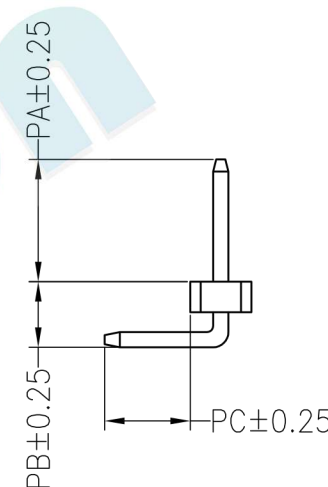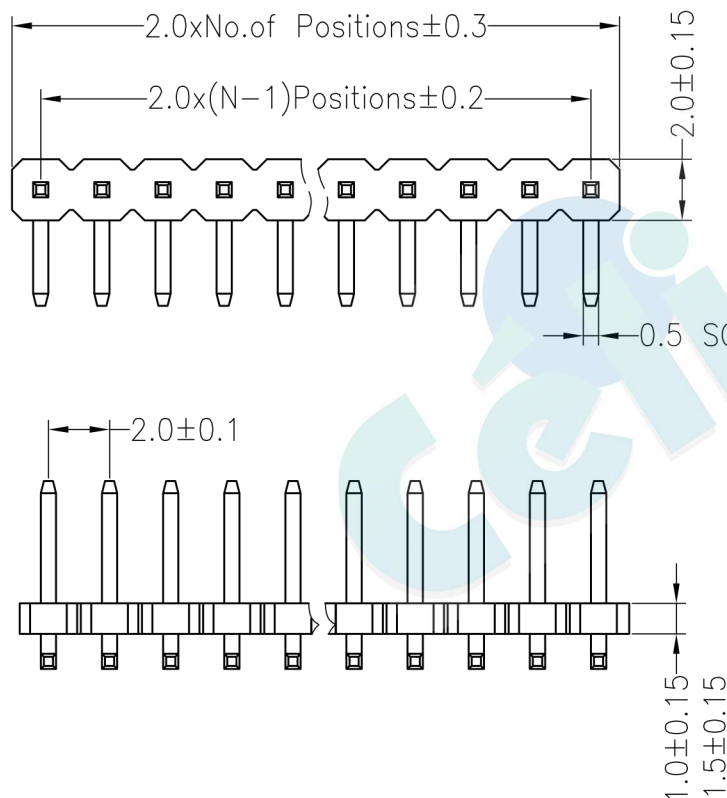

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	1.60	2.80	8.90
Alternate				

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	13(H)DR - 11XX - XXX - XXX
				X.XXX	±0.10							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	PROJ.						

PIN HEADER DIP RIGHT ANGLE SINGLE ROW


13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

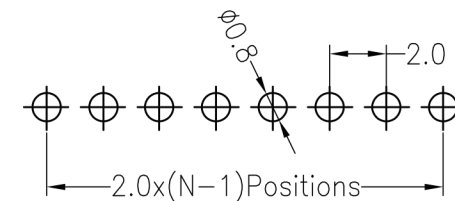

Ordering Information

1320DR - 11 (XX) - AAA - B C P (1) 01*

1. Connector Series

2. (H) Hauteur isolant

- H = 20(Hauteur isolant : 2.0mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating

- A = 0.8U" Gold
- B = 1U" Gold
- C = 1.5U" Gold
- D = 2U" Gold
- E = 3U" Gold
- F = Gold Flash/Tin
- G = Tin





7. Post

- W (With Post)
- Ø (No Post)

*01 = Type 1

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

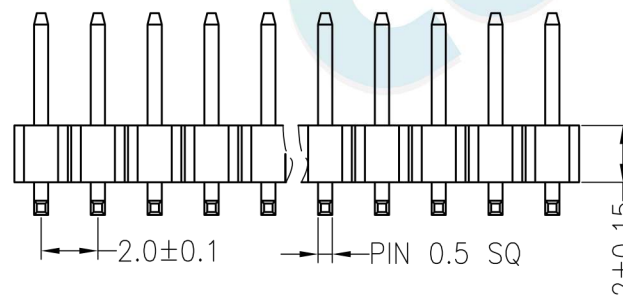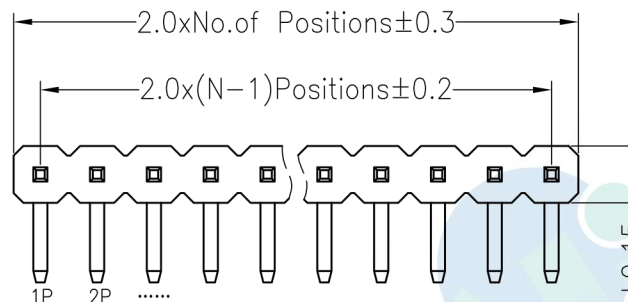

Dimension antitheses list				
ITEM	PA	PC	PB	L
Standard	4.00	2.80	3.15	10.50
Alternate				

				OPERATION		DRAW	BEN	12.04.11	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	CHECK			UNIT	mm	PART NO.	1320DR - 11XX - XXX - XXX 01
				X.XXX	±0.10				SIZE	A4		
A0	2012.04.11	NEW DRAWING		Angle	±3°	APPROVE			SHEET	1/1	TITLE:	2.0PH 1xNpin Single 90°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL		PROJ.	◆				

PIN HEADER DIP RIGHT ANGLE SINGLE ROW


13 SERIES. 2.00MM PITCH



Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

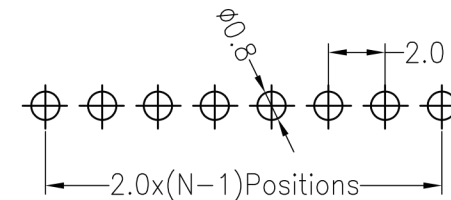

Ordering Information

1320DR - 11 (XX) - AAA - B C P (1) 02*

- 1. Connector Series**
- 2. (H) Hauteur isolant**
 - H = 20(Hauteur isolant : 2.0mm)
- 3. Number of pins per row**
- 4. Pin Length**
- 5. Insulator Material Option**
 - A = BK-PBT
 - B = BK-PA66
 - C = BK-PA6T
 - D = BK-PA46
 - E = BK-LCP
- 6. Contact Plating**
 - A = 0.8U" Gold
 - B = 1U" Gold
 - C = 1.5U" Gold
 - D = 2U" Gold
 - E = 3U" Gold
 - F = Gold Flash/Tin
 - G = Tin
- 7. Post**
 - W (With Post)
 - Ø (No Post)

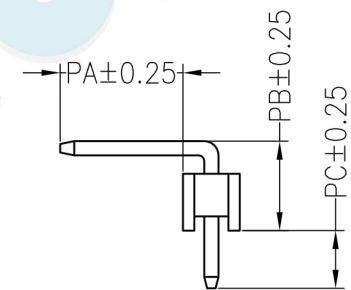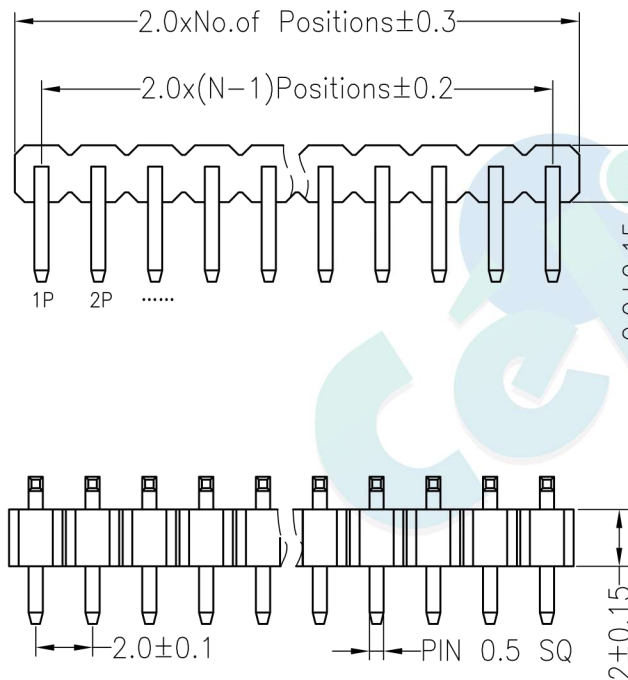

*02 = Type 2
(1). Packaging
Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

Dimension antitheses list				
ITEM	PA	PC	PB	L
Standard	4.00	2.80	3.15	10.50
Alternate				

				OPERATION		DRAW	BEN	12.04.11	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	CHECK			UNIT	mm	PART NO.	1320DR - 11XX - XXX - XXX 02
				X.XXX	±0.10							
A0	2012.04.11	NEW DRAWING		Angle	±3°	APPROVE			SIZE	A4	TITLE:	2.0PH 1xNpin Single 90°
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9	PROJ.			