

PIN HEADER DIP DUAL ROW DOUBLE PLASTIC

14 SERIES - 1.27MM PITCH



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specifications

- Rated Current: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material: Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 10 seconds

Ordering Information

1425D - 22 (XX) - AAA - B C P (1)

1 2
3
4
5
6
7

1. Connector Series

2. (H) Hauteur isolant

- H = 25 (Hauteur isolant : 2.5mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T
- F = BK-LCP

6. Contact Plating





- A = Gold Flash
- B = 3U" Gold
- C = 5U" Gold
- D = 10U" Gold
- E = 15U" Gold
- F = 30U" Gold
- G = Gold Flash/Tin
- H = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2= Tube 3=Tube+Cap 4=Reel+Cap
5=Reel+Mylar

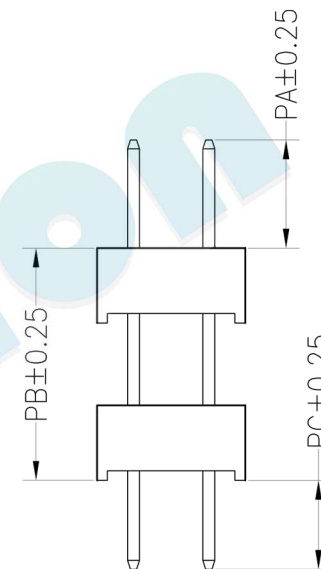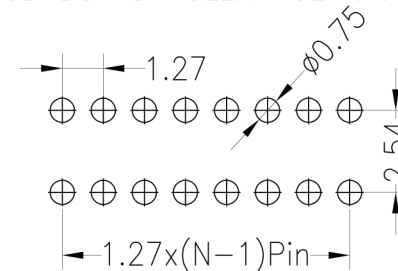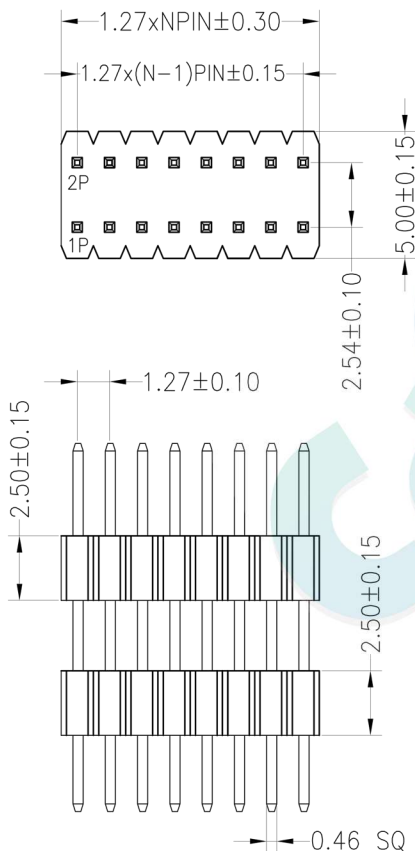

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	2.80	5.00	1.80	9.60
Alternate				

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	1425D - 22XX - XXX - XXX
				X.XXX	±0.10		SIZE	1/1				
A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE			SHEET	1/1	TITLE:	1.27*2.54PH 2*H2.5mm 2xNpin DIP
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL		PROJ.	◆				
1	2	3	4	5	6	7	8	9				