PIN HEADER SMT DUAL ROW DOUBLE PLASTIC

14 SERIES - 1.27MM PITCH

HSF RoHS FILE NO:E362810

Specifications

- Rated Current: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
  260° for 10 seconds

Ordering Information

1425S - 22 (XX) - AAA - B C P (1)
(1 = 1425S, 2 = 22, 3 = XX, 4 = AAA, 5 = B, 6 = C, 7 = P)

1. Connector Series

2. (H) Hauteur isolant
- H = **25** (Hauteur isolant : 2.54mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option
- **A** = BK-PBT
- **B** = BK-PA66
- **C** = BK-PA6T
- **D** = BK-PA46
- **E** = BK-LCP



6. Contact Plating
- **A** = Gold Flash
- **B** = 3U" Gold
- **C** = 5U" Gold
- **D** = 10U" Gold
- **E** =15U" Gold
- **F** =30U" Gold
- **G**=Gold Flash/Tin
- **H**= Tin

7. Post
- **W** (With Post)
- **Ø** (No Post)

***(1)*. Packaging**
Ø = PE Bag **1**= Tray **2**= Tube **3**=Tube+Cap **4**=Reel+Cap **5**=Reel+Mylar

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

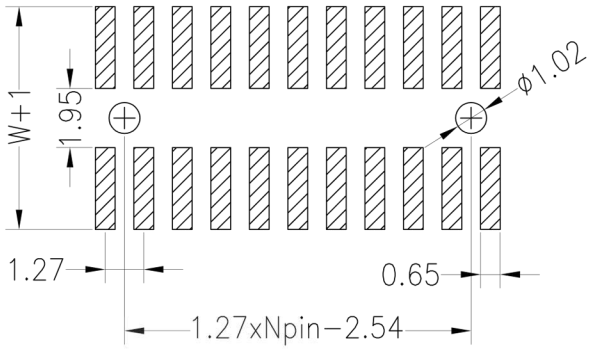

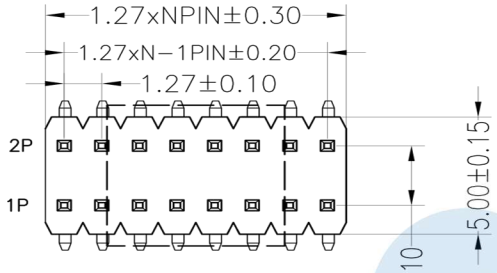

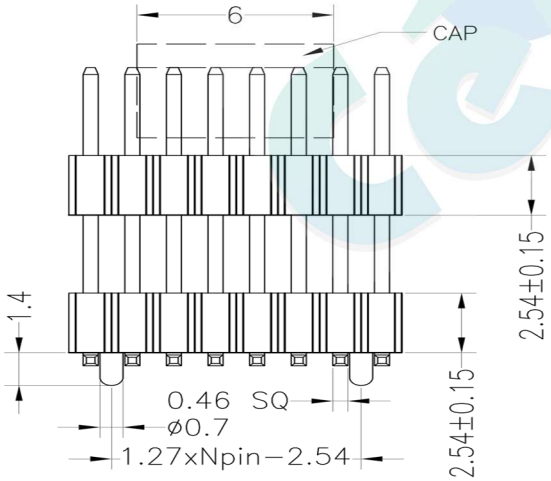

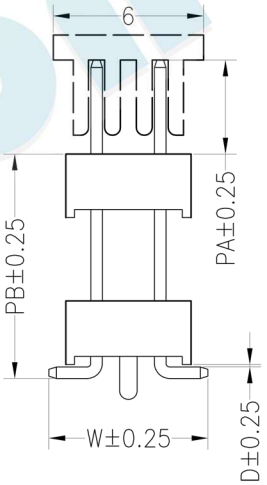

Dimension antitheses list					
ITEM	PA	PB	D	W	L
Standard	2.80	7.70	0.10	7.50	12.5
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	12.03.28
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

Célion votre partenaire en électronique

PART NO.	1425S - 22XX - XXX - XXX
TITLE:	1.27*2.54PH H2.54+H2.54mm 2xNpin SMT