

PIN HEADER DIP DUAL ROW


17 SERIES - 0.8MM PITCH



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specifications

- Rated Current: 0.75AMP
- Contact Resistance: 30mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 10 seconds

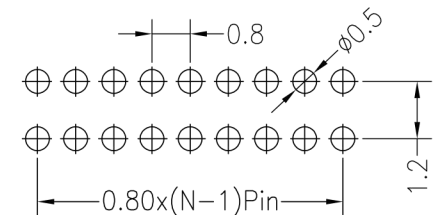

Ordering Information

1713D - 12 (XX) - AAA - B C P (1) 0X*

1. Connector Series

2. (H) Hauteur isolant

- H = 13 (Hauteur isolant : 1.38mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T*
*Uniquement pour Type 1
- F = BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post




- W (With Post)
- Ø (No Post)

8.Type


- X = 1 (Type 1)
- X = 2 (Type 2)

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

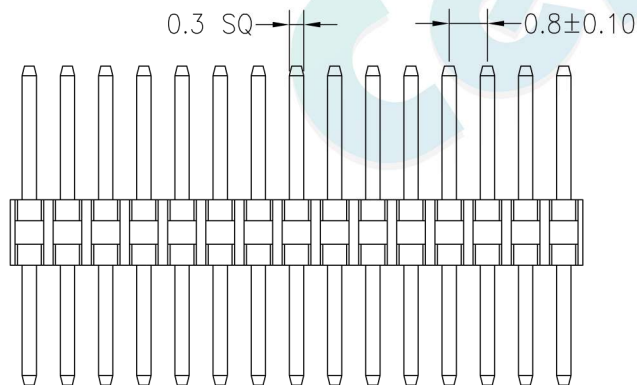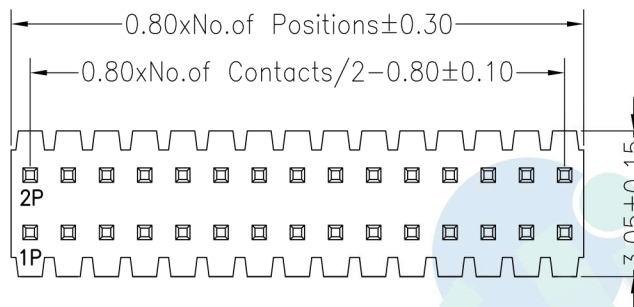


Type 1



Dimension antitheses list			
ITEM	PA	PC	L
Standard	1.80	1.00	4.20
Alternate			

Type 2



Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.20	2.80	6.40
Alternate			

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

BEN

12.04.11

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.



PART NO.

1713D - 12XX - XXX - XXX 0X

TITLE:

0.8*1.2mm Pin Header Dual Row 90°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	