

FEMALE HEADER DIP DUAL ROW U-TYPE

22 SERIES - 2.54MM PITCH



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 10 seconds

Ordering Information

2250D - 2 U (XX) - A B C (1) 04*

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 50 (Hauteur isolant : 5.0mm)

3. U-Type

4. Number of pins per row

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin






7. Post

- W (With Post)
- Ø (No Post)

(04)* = Type 4

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

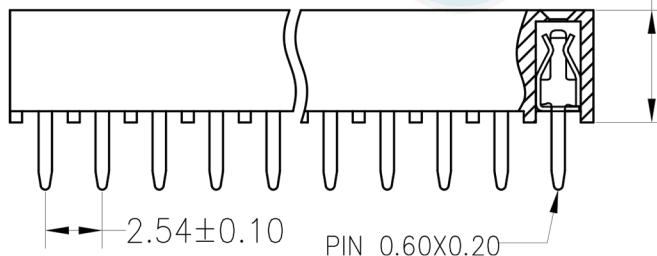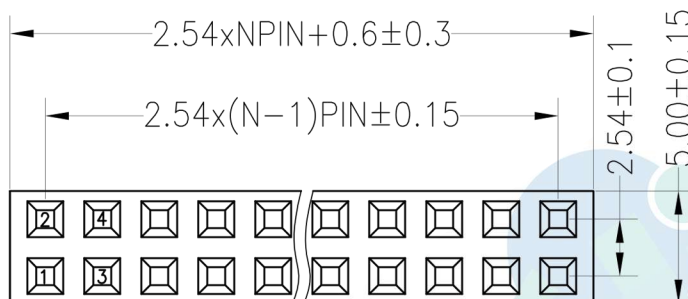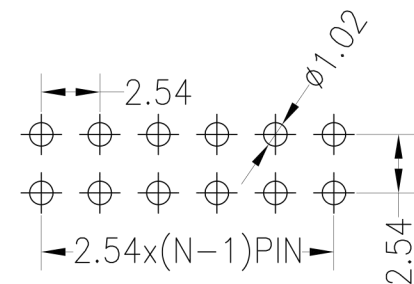

OPERATION		DRAW	BEN	12.04.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	◆



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

PART NO.	2250D - 2UXX - XXX 04
TITLE:	2.54PF H5.0mm 2xNpin 180°

FEMALE HEADER DIP DUAL ROW U-TYPE

22 SERIES - 2.54MM PITCH



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 10 seconds

Ordering Information

2250D - 2 U (XX) - A B C (1) 05*

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 50 (Hauteur isolant : 5.0mm)

3. U-Type

4. Number of pins per row

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 1.5U" Gold
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = Gold Flash/Tin
- G = Tin






7. Post

- W (With Post)
- Ø (No Post)

(05)* = Type 5

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

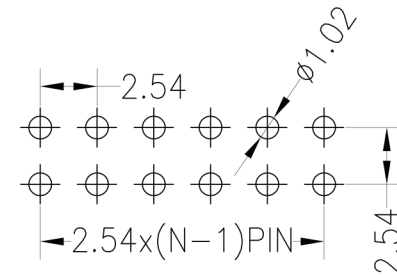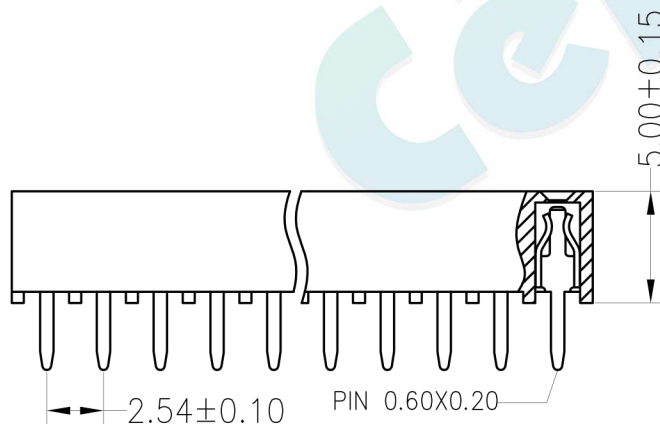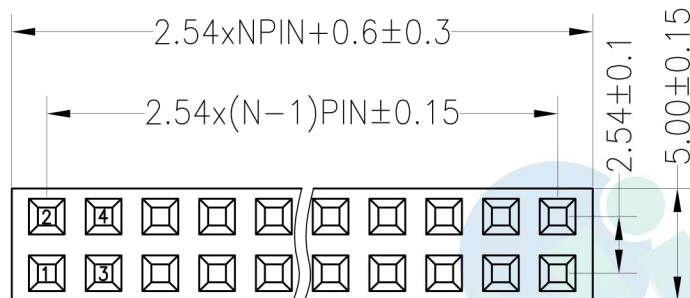

OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	votre partenaire en électronique	
X.X	±0.30							
X.XX	±0.20	CHECK			UNIT	mm	PART NO.	2250D - 2UXX - XXX 05
X.XXX	±0.10				SIZE	A4		
Angle	±3°	APPROVE			SHEET	1/1	TITLE:	2.54PF H5.0mm 2xNpin 180°
DIM	TOL				PROJ.			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

FEMALE HEADER DIP DUAL ROW Y-TYPE


22 SERIES - 2.54MM PITCH



Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

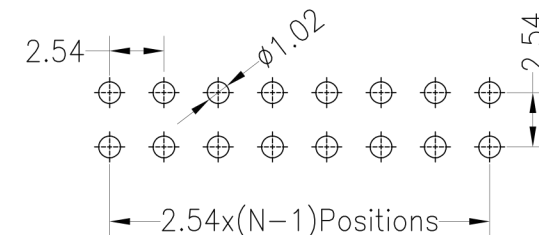

Ordering Information

2257D - 2 Y (XX) - A B C (1)

1. Connector Series

2. (H) Hauteur isolant

- H = 57 (Hauteur isolant : 5.7mm)

3. Y-Type

4. Number of pins per row

5. Insulator Material Option





- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D =BK-PA46
- E =BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F= Gold Flash/Tin
- G= Tin

7. Post

- W (With Post)
- Ø (No Post)

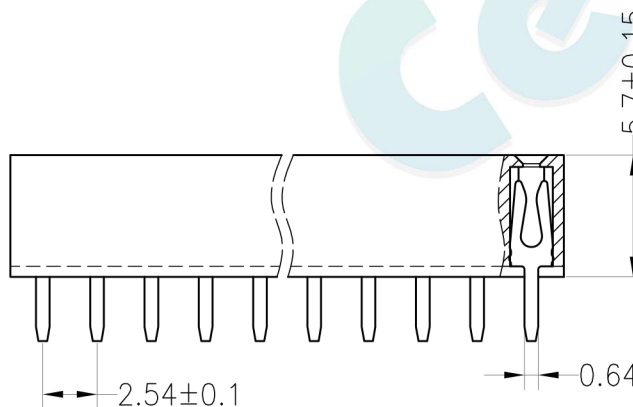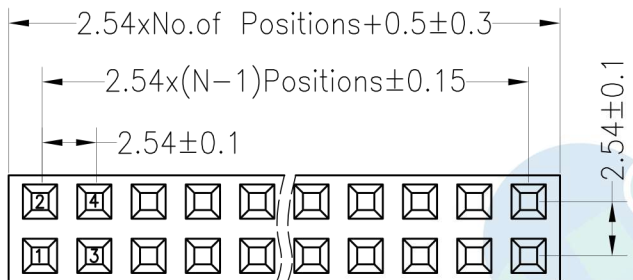

(1). Packaging
Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	votre partenaire en électronique	
				X.X	±0.30							
				X.XX	±0.20	APPROVE			SIZE	A4	PART NO.	2257D - 2YXX - XXX
				X.XXX	±0.10							
A0	2012.04.18	NEW DRAWING		Angle	±3°	PROJ.		TITLE:	2.54PF H5.7mm 2xNpin 180° DIP			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							