

FEMALE HEADER DIP RIGHT ANGLE DUAL ROW SIDE ENTRY


22 SERIES - 2.54MM PITCH



Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PBT
- Max. Processing Temp : 180° for 30-60 seconds
200° for 10 seconds

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

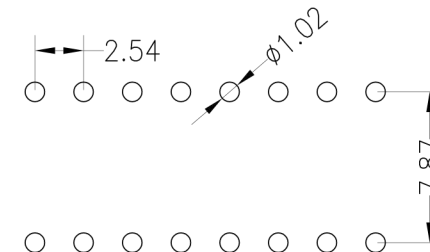

Ordering Information

2281DR - 2 U (XX) - A B C (1)

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 81 (Hauteur isolant : 8.1mm)

3. U-Type

4. Number of pins per row

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T
- F = BK-LCP

6. Contact Plating





- A = Gold Flash
- B = 1.5U" Gold
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = Gold Flash/Tin
- G = Tin

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

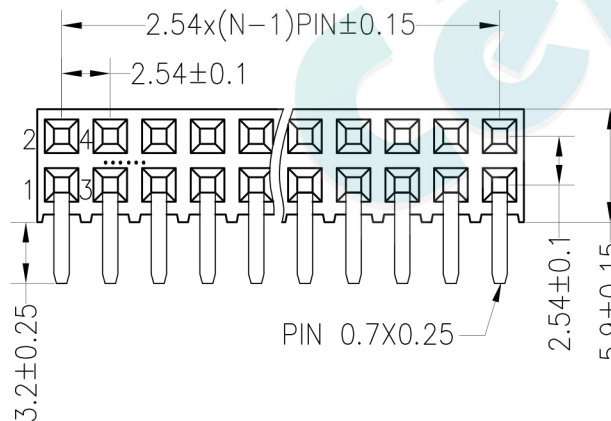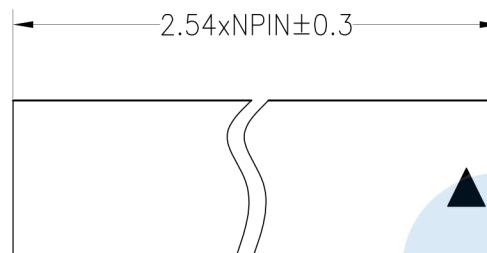

| | | | | OPERATION | | DRAW | BEN | 12.04.18 | SCALE | FIT | votre partenaire en électronique | |
|-----|------|--------------------------|--------|-----------|-------|---------|-----|----------|-------|-----|----------------------------------|---------------------|
| | | | | X.X | ±0.30 | | | | | | | |
| | | | | X.XX | ±0.20 | APPROVE | | | SIZE | A4 | PART NO. | 2281DR - 2UXX - XXX |
| | | | | X.XXX | ±0.10 | | | | | | | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | PROJ. | | | | | | |