

# FEMALE HEADER DIP QUAD ROW Y-TYPE


## 23 SERIES - 2.00MM PITCH



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

### Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds  
260° for 10 seconds

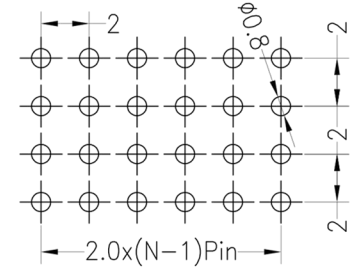

### Ordering Information

**2363D - 4 Y (XX) - A B C (1) 01\***

1 2 3 4 5 6 7

#### 1. Connector Series

#### 2. (H) Hauteur isolant

- H = 63 (Hauteur isolant : 6.35mm)

#### 3. Y-Type

#### 4. Number of pins per row

#### 5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D =BK-PA46
- E =BK-LCP





#### 6. Contact Plating


- A = Gold Flash
- B = 3U" Gold
- C = 5U" Gold
- D = 10U" Gold
- E= 15U" Gold
- F= 30U" Gold
- G=Gold Flash/Tin
- H= Tin

#### 7. Post

- W (With Post)
- Ø (No Post)

(01)\* = Type 1  
(1). Packaging  
Ø=PE Bag 1=Tray 2=Tube

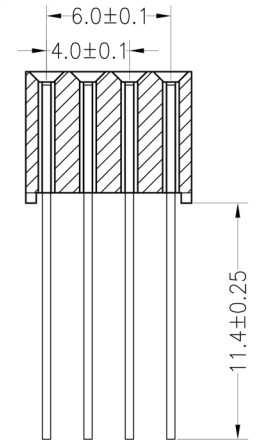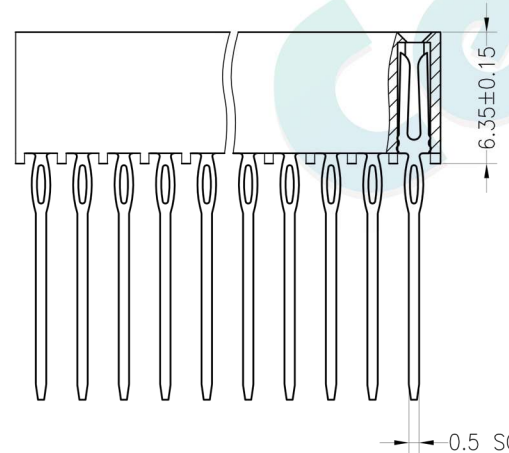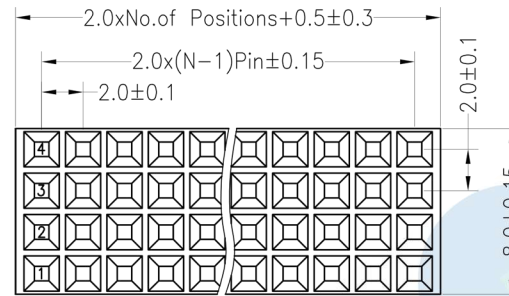

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	2363D - 4YXX - XXX 01
				X.XXX	±0.10	APPROVE			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.	◆	TITLE:	2.0PF 4xNPin H6.35 W8.0 PC104