

# FEMALE HEADER DIP RIGHT ANGLE DUAL ROW U-TYPE


## 23 SERIES - 2.00MM PITCH



### Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds  
260° for 10 seconds

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)




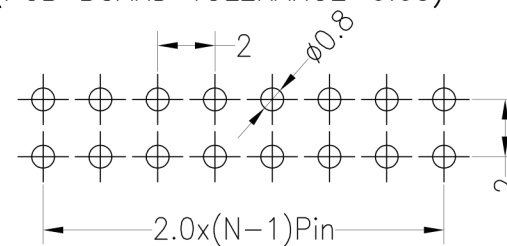


### Ordering Information

**2372DR - 2 U (XX) - A B C (1) 01\***

1 2                      3 4                      5 6 7

- 1. Connector Series**
- 2. (H) Hauteur isolant**
  - H = 72 (Hauteur isolant : 7.2mm)
- 3. U-Type**
- 4. Number of pins per row**
- 5. Insulator Material Option**
  - A = BK-PBT
  - B = BK-PA66
  - C = BK-PA6T
  - D =BK-PA46
  - E =BK-LCP
- 6. Contact Plating**
  - A = Gold Flash
  - B = 5U" Gold
  - C = 10U" Gold
  - D = 15U" Gold
  - E = 30U" Gold
  - F= Gold Flash/Tin
  - G= Tin
- 7. Post**
  - W (With Post)
  - Ø (No Post)

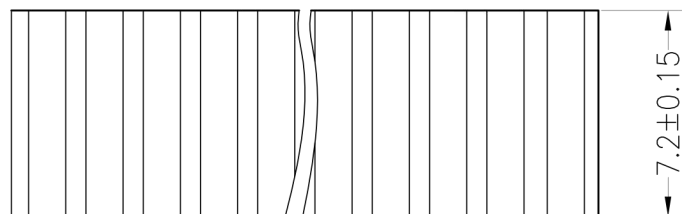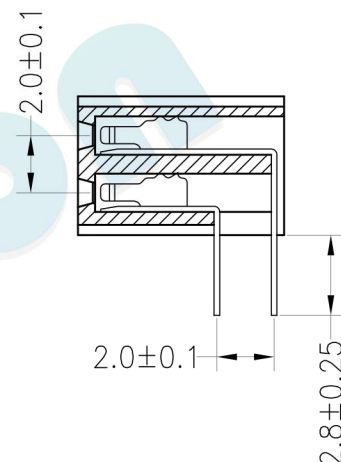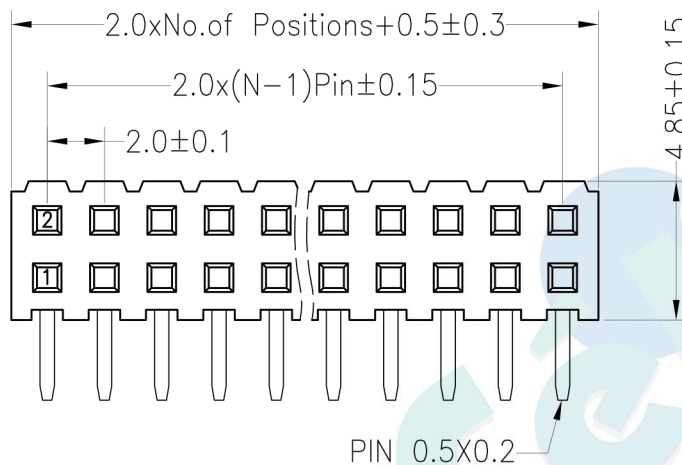

(01)\* = Type 1  
(1). Packaging  
Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap



				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			2372DR - 2UXX - XXX 01
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			2.00PF H7.2mm 2xNpin 90°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.					

# FEMALE HEADER DIP RIGHT ANGLE DUAL ROW U-TYPE


## 23 SERIES - 2.00MM PITCH



### Specifications

- Rated Current: 1.5AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds  
260° for 10 seconds

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

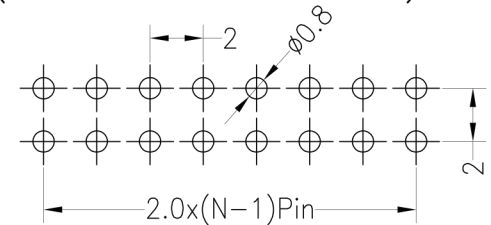

### Ordering Information

**2372DR - 2 U (XX) - A B C (1) 02\***

1 2 3 4 5 6 7

#### 1. Connector Series

#### 2. (H) Hauteur isolant

- H = 72 (Hauteur isolant : 7.2mm)

#### 3. U-Type

#### 4. Number of pins per row

#### 5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T
- F = BK-LCP

#### 6. Contact Plating

- A = Gold Flash
- B = 5U" Gold
- C = 10U" Gold
- D = 15U" Gold
- E = 30U" Gold
- F = Gold Flash/Tin
- G = Tin



#### 7. Post

- W (With Post)
- Ø (No Post)



(02)\* = Type 2

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

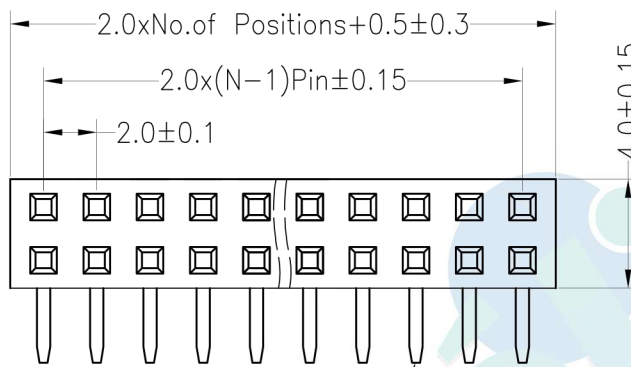

PIN 0.5X0.2

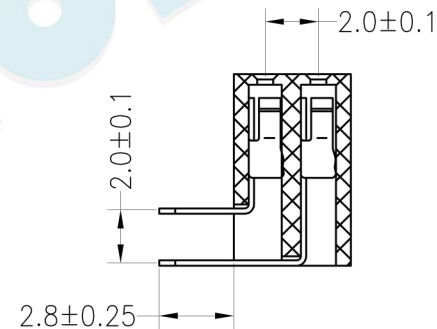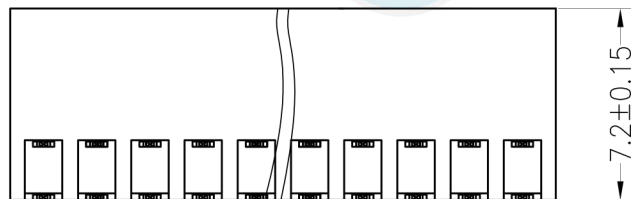

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	2372DR - 2UXX - XXX 02			
				X.XXX	±0.10		SHEET	1/1	TITLE:	2.00PF H7.2mm 2xNpin 90°			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	PROJ.					