

IDC CONNECTOR DIP TYPE

5440 SERIES - 1.27MM



Specifications

- Rated current: 1.0AMP
- Contact resistance: 20mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Brass
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)
- Standard: PBT
- Max. processing Temp: 180°C for 30-60 seconds
200°C for 10 seconds

Ordering Information

5440D - XX X B B 01

1 2 3 4 5

1. Connector Series

2. Number of pins (4→80P)

3. Contact plating




- A = Tin
- B = Gold Flash
- C = 5U" Gold
- D = 10U" Gold
- E = 15U" Gold
- F = 30U" Gold
- G = Gold Flash/Tin


4. Connecteur Type

- B = Brass

5. Color type

- B = Black

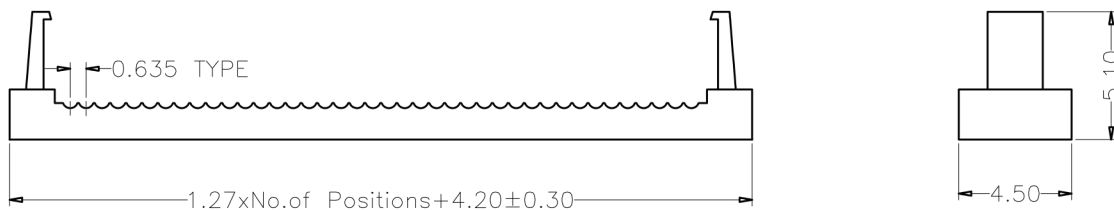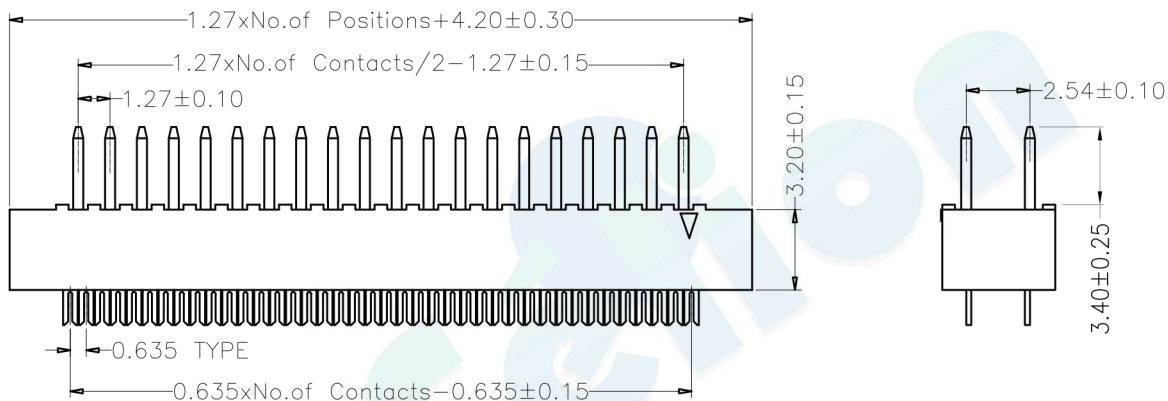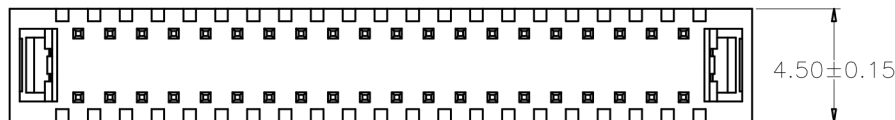

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.			5440D - XXXBB 01
				X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:			1.27x2.54 DIP NPin two type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	◆				