

IDC CONNECTOR DIP TYPE

5440 SERIES - 1.27MM



Specifications

- Operation temperature: -20°C to +105°C
- Contact resistance: 30mΩ max
- Insulation resistance: 1000MΩ min
- Withstand Voltage: 500V AC
- Insulator material: Polyester (ULV-0)
- Standard: PBT Black
- Contact material: Brass

Ordering Information

5440D - XX X P B 01

1
2
3
4

1. Connector Series








2. Number of pins (10→100P)

3. Contact plating



- A = Gold Flash/Ni
- B = 3U" Gold/Ni
- C = 5U" Gold/Ni
- D = 10U" Gold/Ni

4. Color type

- B = Black

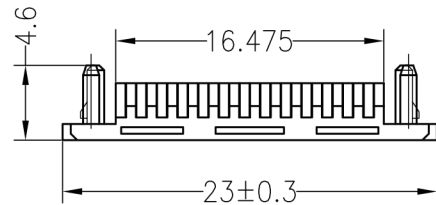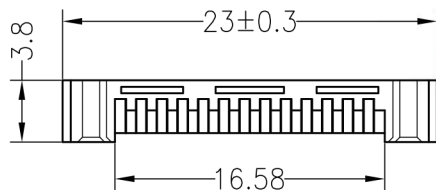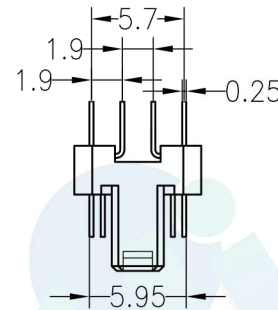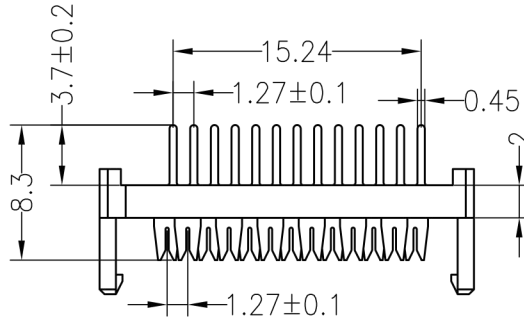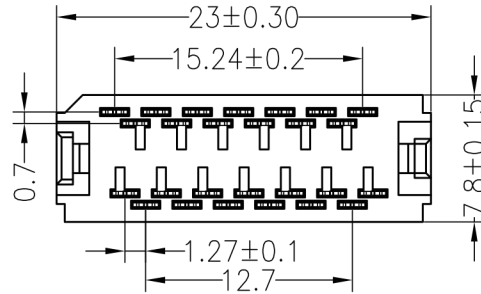

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

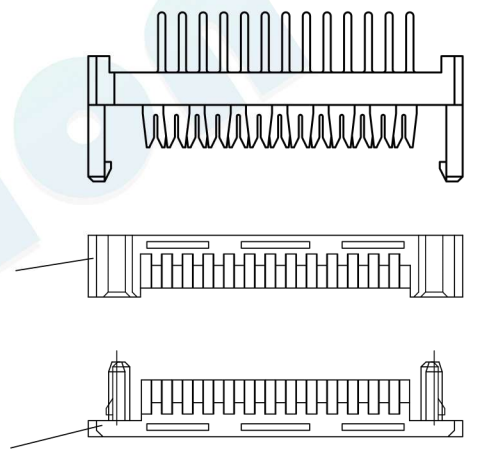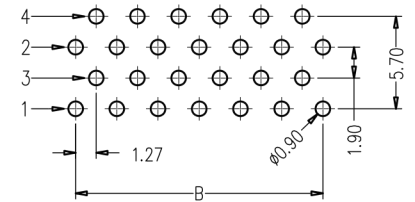

				OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO. 5440D - XXXPB 01	
				X.XXX	±0.10				SHEET	1/1		
A0	2012.04.18	NEW DRAWING		Angle	±3°	APPROVE			TITLE:	DIP 26P		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL				PROJ.			