

IDC CONNECTOR DIP Y-TYPE

5460 SERIES - 2.54MM



Specifications










- Rated current: 3.0AMP
- Contact resistance: 20mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation resistance: 1000MΩ min
- Operation temperature: -40°C to +105°C
- Contact material: Phosphore bronze
- Contact plating: Au Or Sn Over Ni
- Insulator material: Polyester (UL94V-0)
- Standard: PBT
- Max. processing Temp: 180°C for 30-60 seconds
200°C for 10 seconds

Ordering Information

5460DY - XX X P B 01

1
2
3
4
5

- 1. Connector Series**
- 2. Number of pins (8→24P)**
- 3. Contact plating**
 - A = Gold Flash/Ni
 - B = Ni
- 4. Connecteur Type**
 - P = Phosphore bronze
- 5. Color type**
 - B = Black

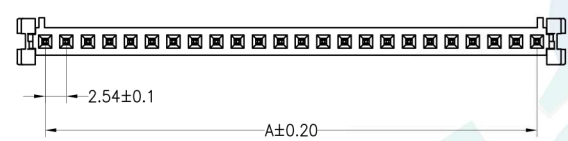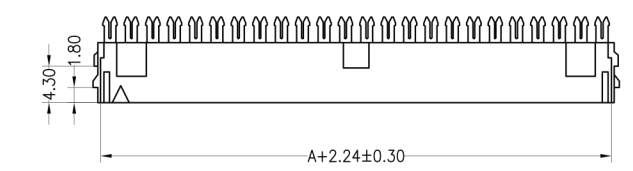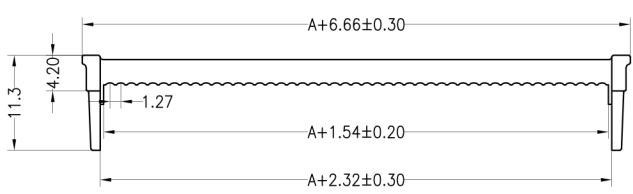

PART NO	Dim. A
8P	17.78
10P	22.86
14P	33.02
16P	38.10
24P	58.42

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	PART NO.	TITLE:
1	2	3	4	DIM	TOL	5							
A0	2012.04.18	NEW DRAWING			X.X	±0.30	CHECK			UNIT	mm	5460DY - XXXPB 01	2.54 Single FC-NPIN
					X.XX	±0.20							
					X.XXX	±0.10							
					Angle	±3°	APPROVE			SHEET	1/1		
										PROJ.			

