
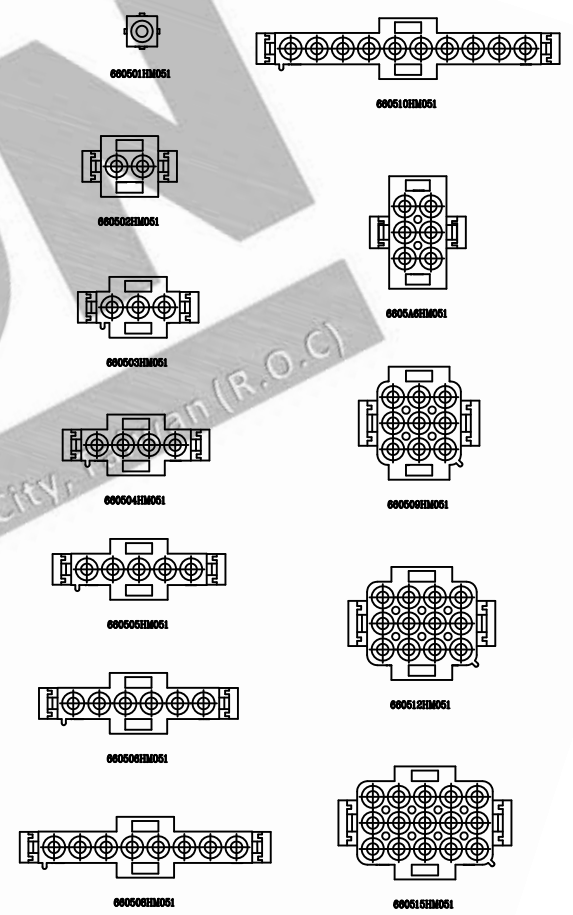
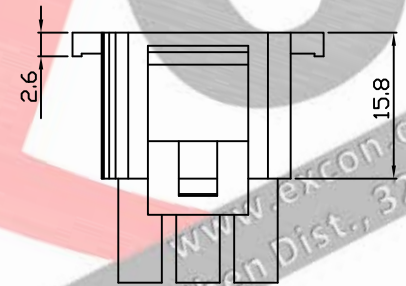
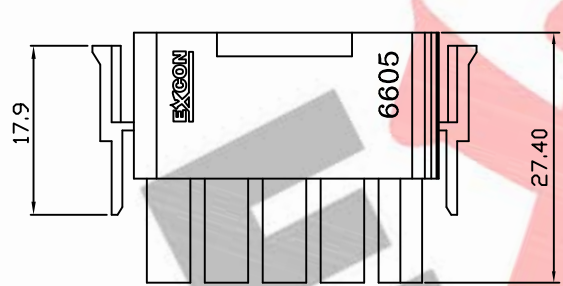
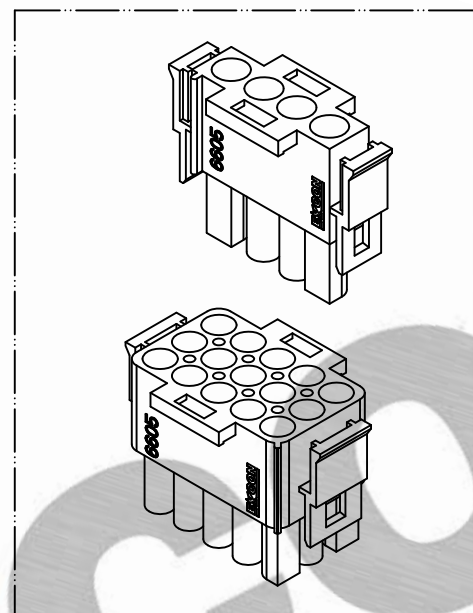


PART NO. 6605xxHM051  
 DWG NO. C6605HM

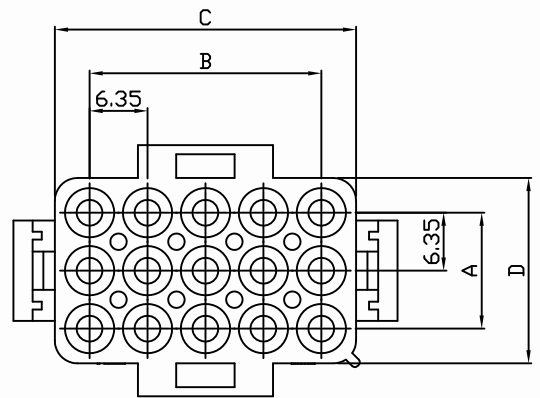

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B	Dim C	Dim D
660501HM051	1	--	--	9.65	9.65
660502HM051	2	6.35	--	7.6	13.97
660503HM051	3	12.70	--	7.6	20.32
660504HM051	4	19.05	--	7.6	26.67
660505HM051	4	25.04	--	7.6	33.02
660506HM051	6	31.75	--	7.6	39.37
6605A6HM051	6	6.35	12.70	20.32	13.97
660508HM051	8	44.45	--	7.6	52.07
660509HM051	9	12.70	12.70	20.32	20.32
660510HM051	10	57.15	--	7.6	64.77
660512HM051	12	19.05	12.70	20.32	26.67
660515HM051	15	25.40	12.70	20.32	33.02

- NOTE:
1. Housing Material: Nylon 66 UL94V2
  2. Color: Natural
  3. Withstand voltage: 5000V AC/minute.
  4. Current rating: 5A AC/DC.
  5. Voltage rating: 600V AC/DC

REV.	REVISION	DIS	DATE	UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE ±0.5 ±0.10 2 PLACE ±1.5 ±0.25 1 PLACE ±2.0 ±0.50 ANGLE DIM	 <b>EXCON TECHNOLOGY COMPANY</b>
SCALE	REV.	PAGE	UNIT		
1/1	A	1	THIRD ANGLE PROJECTION	C6605HM	PART.NO 6605xxHM051