

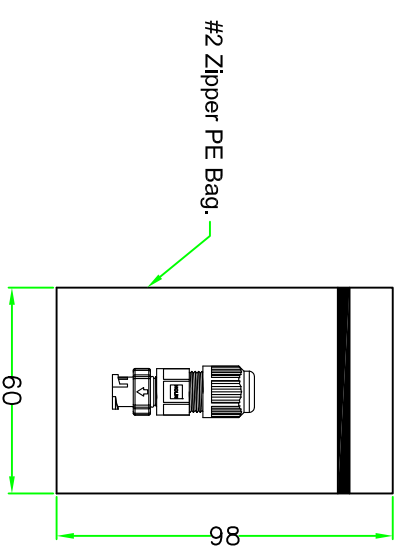
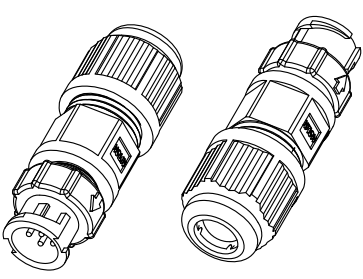
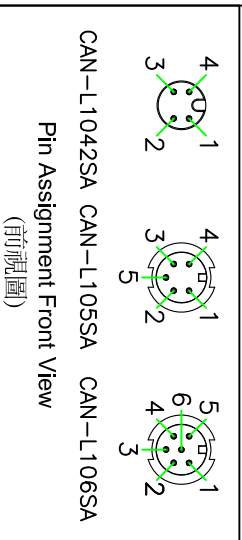


REV.	DESCRIPTION	DATE
A	ISSUE	Dec/24/2013

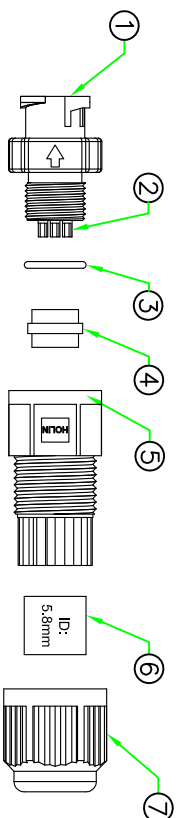

7	CLAMP NUT	NYLON+GF.	BLACK	1	CAM8-CLAMP (70-135-N10)				
6	SEAL	RUBBER. (Suitable for cable OD= 3~5.8mm.)	BLACK	1	CAM8-SEAL (166-135)				
5	HOOD	NYLON.	BLACK	1	CAM8-HOOD (69-135-N6)				
4	GASKET	RUBBER.	BLACK	1	CAM8-G (166-135)				
3	O-RING	SILCON.	BLACK	1	CAA-O-S				
2	CONTACT	BRASS, MALE PIN. 6 u" GOLD PLATED.		N	CAA&CBA-2A-MPS				
1	CONNECTOR	A SIZE MALE CONNECTOR INSERT.NYLON+GF.	BLACK	1	CAN-L1xxM-S-B				
No.	PART NAME	DESCRIPTION			COLOR	Q'TY	REMARKS		

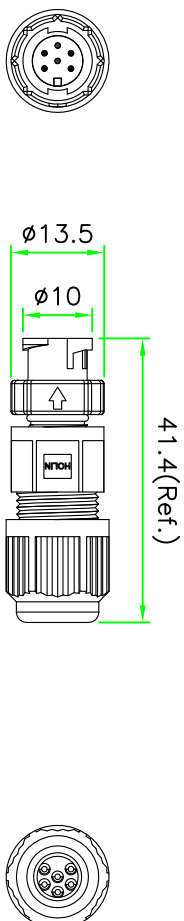

TITLE : Circular A Size Male Pin  
Look Type Field Installable Connector

P/N: CAN-L1xxSA  
DR. JACK

CH: MICHAEL  
AP.

DWG.NO: CAN-L1xxSA

SCALE 1:1  
UNIT: mm  
UNLESS OTHERWISE SPECIFIED TOLERANCES:  
X ±0.25 XX ±0.1  
XXX ±0.05 ANGLE ±1°X  
REV. SHEET 1/1

A