



REV.	DESCRIPTION	DATE
A	ISSUE	Dec/25/2006

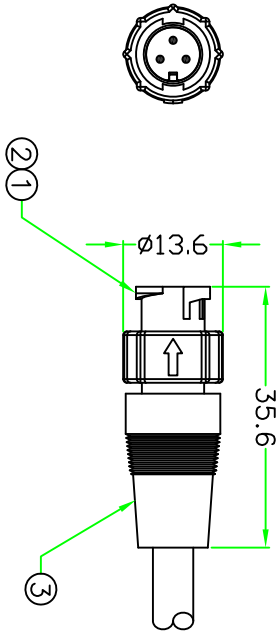


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CAX-L1xxSN
02 - 2 PIN 05 - 5 PIN
03 - 3 PIN 06 - 6 PIN
04 - 4 PIN
D - CURRENT RATING 5A
N - CURRENT RATING 2A


Pin Assignment Front View




CAD-L102SN




CAD-L103SN



CAN-L104SN



CAN-L105SN



CAN-L106SN

No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS
3	OVERMOLD	PVC or PU	Black	1	
2	CONTACT	Brass, male pin , 6u” gold plating.		N	
1	CONNECTOR	Female connector, NYLON+GF.	Black	1	50-135

UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X	SCALE	UNIT: mm	TITLE :	DR: Jack
REV. A	1:1		CIRCULAR A SIZE MALE LOCK TYPE CABLE MOLDING CONNECTOR	CH: ERJC
			P/N: CAX-L1xxSN	AP:
			DWG.NO: CAX-L1xxSN	

