



RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/14/2015

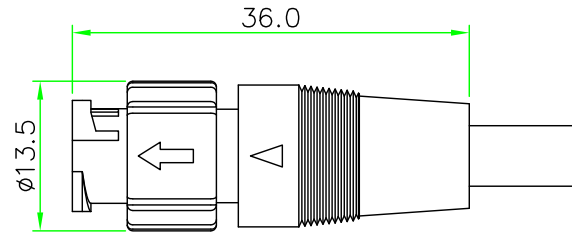

Ref.

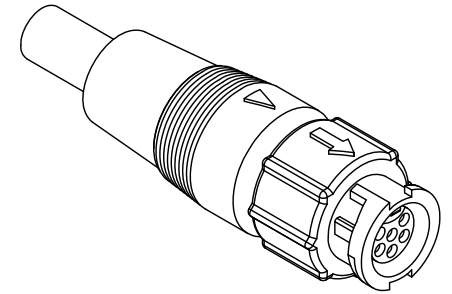

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C



DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CAX-L3xxSN

02 - 2 PIN 04 - 4 PIN
 03 - 3 PIN 05 - 5 PIN
 06 - 6 PIN


D - CURRENT RATING 5A
 N - CURRENT RATING 2A

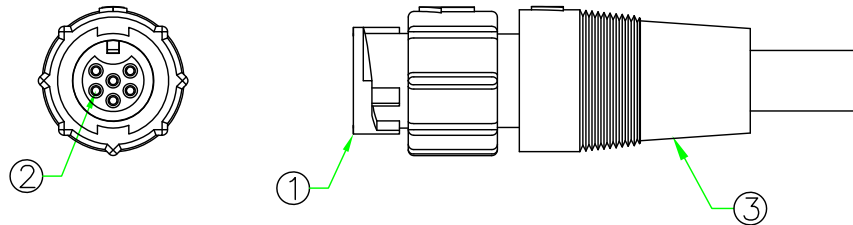


CAD-L302SN




CAD-L303SN



CAN-L304SN



CAN-L305SN



CAN-L306SN

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass, 6u" Gold Plated.Female Pin.		N	
1	CONNECTOR	A Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		TITLE : Circular A Size Lock Type Male Connector Female Pin Molded Cable	
	UNIT: mm	P/N: CAX-L3xxSN	
SCALE	1.5:1	DR. Patty	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx± 0.05 ANGLE ± 1°		CH. ERIC	
REV.	A	DWG.NO: CAX-L3xxSN	
SHEET	1/1	AP.	