


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/25/2009

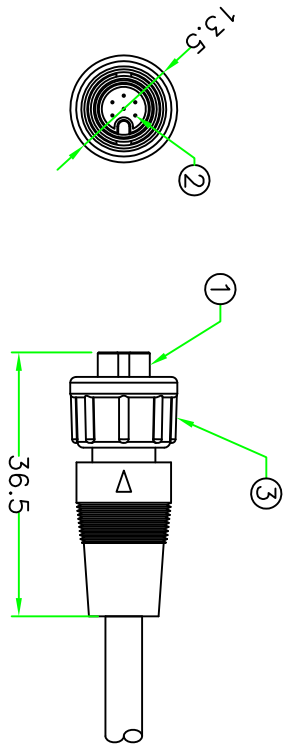

NOTES:
 1. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 2A / 5A
 CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
 2. HOW TO ORDER: CAX-L4xxSN

02 - 2 PIN 05 - 5 PIN
 03 - 3 PIN 06 - 6 PIN
 04 - 4 PIN
 D - CURRENT RATING 5A
 N - CURRENT RATING 2A

CAD-L402SN	CAD-L403SN	CAN-L404SN	CAN-L405SN	CAN-L406SN
------------	------------	------------	------------	------------

Pin Assignment Front View

3	LOCK NUT	Nylon+GF.	BLACK	1	CAN-LN K07(KH1133)
2	CONTACT	BRASS, Male Pin, 6u" Gold Plated.		N	M0.6SP121 -A
1	CONNECTOR	CAN FM Connector Insert. Nylon+GF.	BLACK	1	CAN-4FMG K06(KH1132)
No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS



<p>UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X</p> <p>REV. A SHEET 1/1</p>	<p>SCALE: 1:1</p> <p>UNIT: mm</p>	<p>TITLE: Circular A Size 6P Lock Type Female Connector Male Pin Straight Angle molded cable</p> <p>P/N: CAX-L4xxSN</p> <p>DWG.NO: CAX-L4xxSN</p>	<p>DR. Jack</p> <p>CH. ENGJE</p> <p>AP.</p>
--	-----------------------------------	---	---