
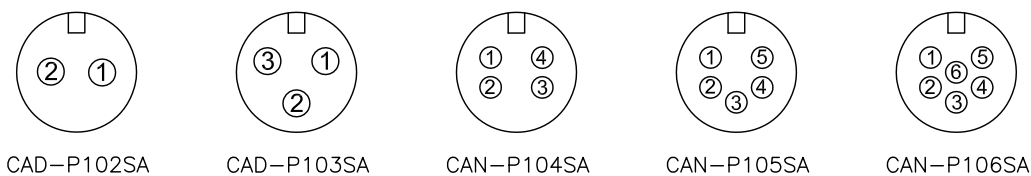
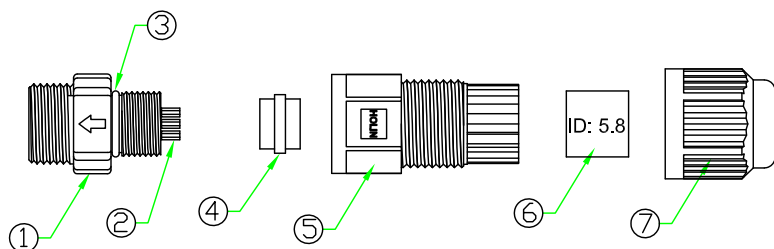
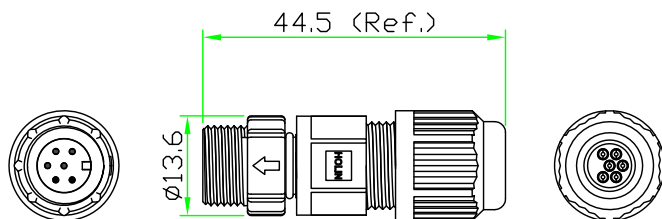


RoHS

IP66~68



PIN ASSIGNMENT FRONT VIEW
(前視圖)

REV.	DESCRIPTION	DATE
A	ISSUE	May/19/2015

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CAx-P1xxSA

02 - 2 PINS 05 - 5 PINS


03 - 3 PINS 06 - 6 PINS

04 - 4 PINS

D - CURRENT RATING 5A

N - CURRENT RATING 2A

#2 Zipper PE Bag.

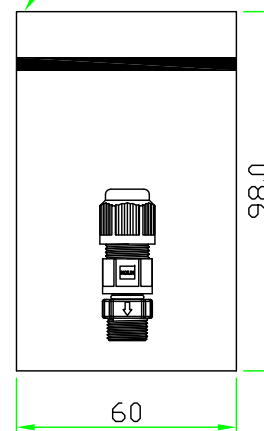

7	CLAMP NUT	NYLON+GF	BLACK	1	
6	TUBE	EPDM. (ID=5.8mm.)	BLACK	1	
5	HOOD	NYLON.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	O-RING	Silcon.	BLACK	1	
2	CONTACT	Brass ,Male Pin. 6u"Gold Plated.		N	
1	CONNECTOR	A Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

 <small>Voire partenaire électronique</small>	
 SCALE 1:1	TITLE : Circular A Size Screw Type Male Connector Male Pin Field Installable Plug
<small>UNLESS OTHERWISE SPECIPED TOLERANCES:</small> .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1° REV. SHEET	P/N: CAx-P1xxSA DWG.NO: CAx-P1xxSA
A 1/1	DR. Patty CH. ERIC AP.