



RoHS

IP66-68

6~12 PINS

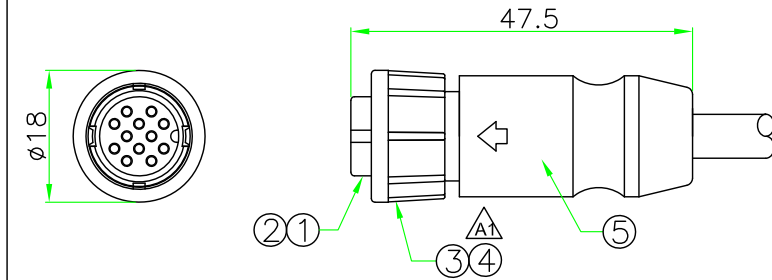

2~5 PINS

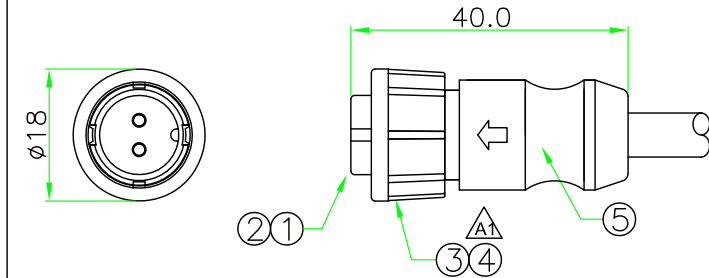


REV.	DESCRIPTION	DATE
A	ISSUE	Feb/12/2005
A1	Change@Shape	Jun/25/2014

NOTES:

- ELECTRICAL CHARACTERISTICS:  
 CURRENT RATING: 2A / 5A / 10A  
 CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L2xxSN

- 02 - 2 PIN    07 - 7 PIN
- 03 - 3 PIN    08 - 8 PIN
- 04 - 4 PIN    10 - 10 PIN
- 05 - 5 PIN    12 - 12 PIN
- 06 - 6 PIN
- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

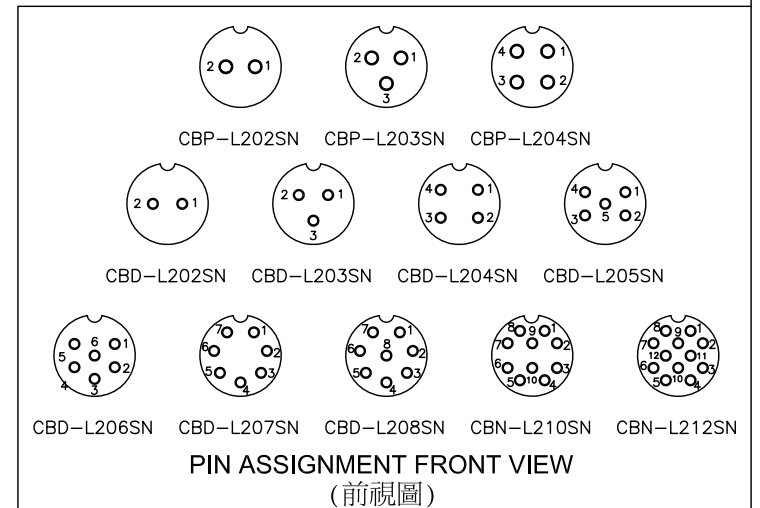

※Cable specification and length can be customized.

5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	NYLON+GF	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE :	Circular B Size Lock Type Female Connector Female Pin Molded Cable	
SCALE	1:1	P/N:	CBx-L2xxSN	DR. Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES:				CH. ERIC
x ±0.25 xx ±0.1		REV.	A1	AP.
xxx ±0.05 ANGLE ±.1gX		SHEET	1/1	
		DWG.NO:	CBx-L2xxSN	