
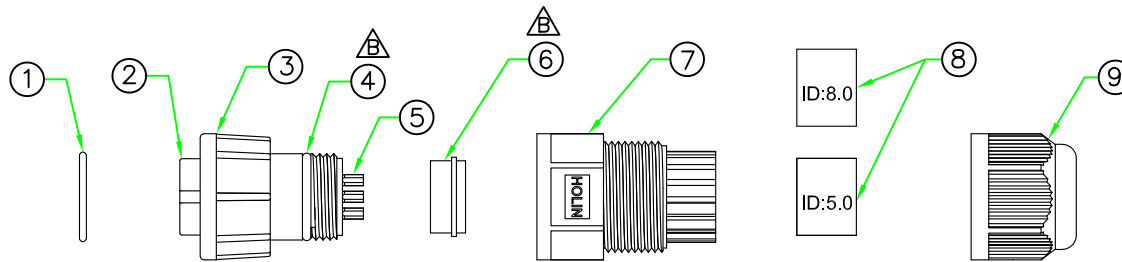


RoHS
IP67

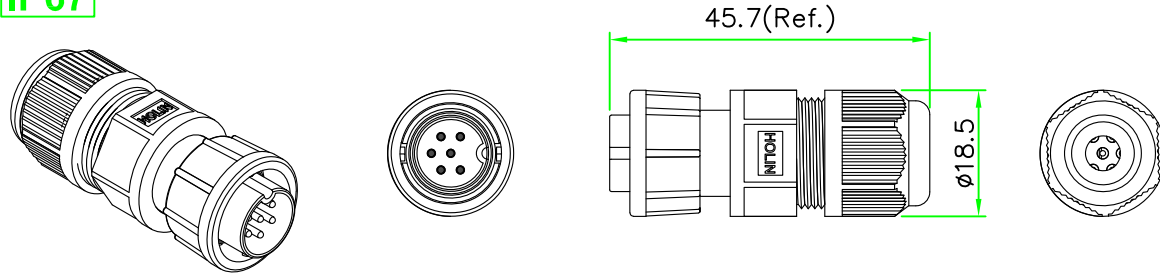


REV.	DESCRIPTION	DATE
A	ISSUE	Jun/16/2016
B	Change O-Ring(EC-108035), add "CBPD" Spec & correct part list.	Dec/04/2019
note1	Change packing method.	Jul/12/2021

NOTES:

1. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 5A / 10A
 CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBx(xx)-L4xxSA

- 02 - 2 PIN 03 - 3 PIN
- 04 - 4 PIN 05 - 5 PIN
- 06 - 6 PIN
- 24 - Hybrid 2 + 4PIN
- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- PD - CURRENT RATING 10A + CURRENT RATING 5A

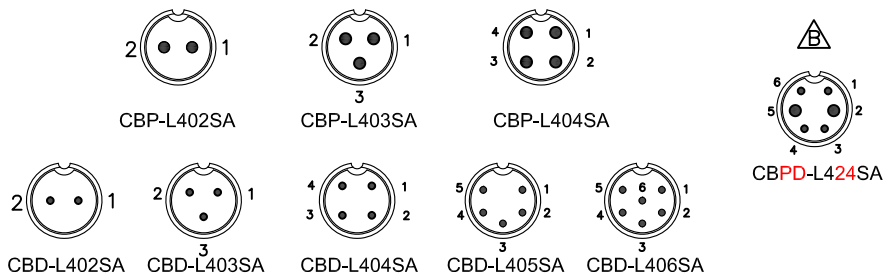

PIN ASSIGNMENT FRONT VIEW (前視圖)





#2 Zipper PE Bag.

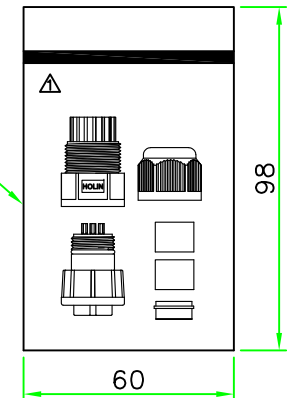

9	CLAMP NUT	Nylon+GF.	BLACK	1	
8	TUBE	EPDM. (ID= 5.0 & 8.0mm)⚠	BLACK	2	
7	HOOD	Nylon.	BLACK	1	
6	GASKET	Silicon.⚠	BLACK	1	
5	CONTACT	Brass, Male Pin. 6u"Gold Plated.		N	
4	O-RING	EPDM.⚠	BLACK	1	
3	LOCK NUT	NYLON+GF.	BLACK	1	
2	CONNECTOR	B Size Female Connector Insert, Nylon+GF.	BLACK	1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		TITLE Circular B Size Lock Type Female Connector Male Pin Field Installable Plug	P/N: CBx(xx)-L4xxSA	DR. JAMES CH. ERIC
UNIT: mm	TITLE Circular B Size Lock Type Female Connector Male Pin Field Installable Plug			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1'				
REV. B	SHEET 1/1	DWG.NO: CBx(xx)-L4xxSA		

RoHS

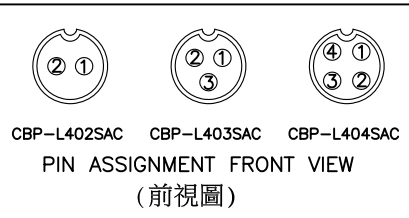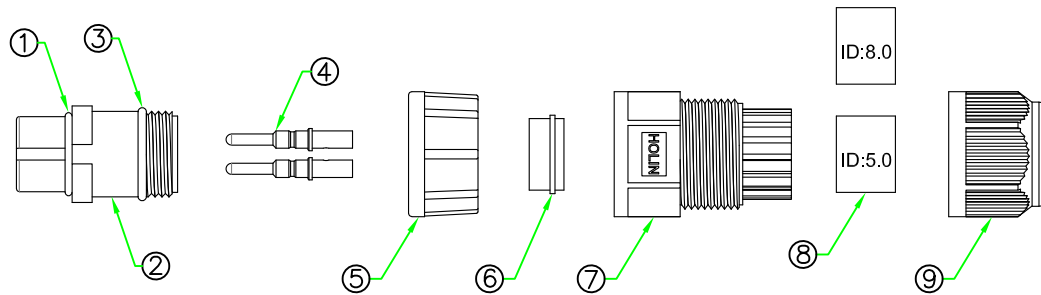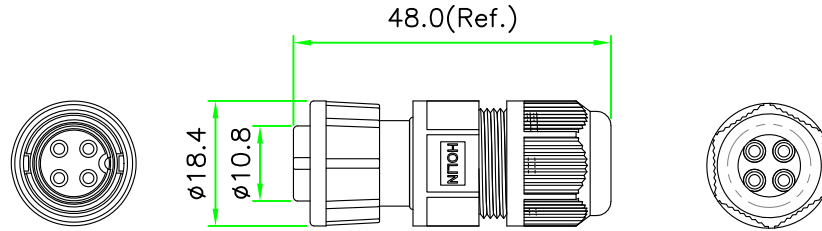

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/28/2021

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBP-L4xxSAC

02 - 2 PIN

03 - 3 PIN

04 - 4 PIN

P - CURRENT RATING 10A

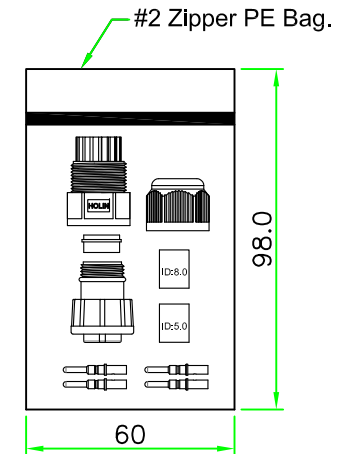

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	LOCKING NUT	NYLON+GF	BLACK	1	
4	CONTACT	BRASS ,Male Pin. 6u"Gold Plated.		N	
3	O-RING	EPDM.	BLACK	1	
2	CONNECTOR	B Size Female/Male Connector Insert, NYLON+GF.		1	
1	O-RING	NBR.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm TITLE : Circular B Size Lock Type Female Connector Male Pin Field Installable Plug with Crimp Pin

SCALE 1:1
UNLESS OTHERWISE SPECIFIED TOLERANCES:
x ±1.0 xx ±0.5
xxx ±0.25 ANGLE ± 1'
REV. A SHEET 1/1 DWG.NO: CBP-L4xxSAC

P/N: CBP-L4xxSAC
DR. James
CH. ERIC
AP.