







RECOMMENDED  
PANEL CUT OUT

**RoHS**  
**IP66~68**

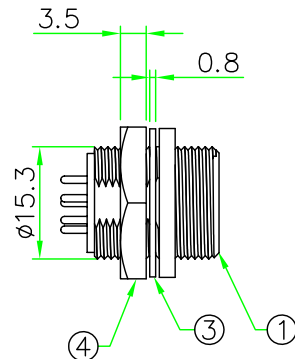

P/N NO.	D
CBP	∅1.25
CBD	∅1.0
CBN	∅0.8

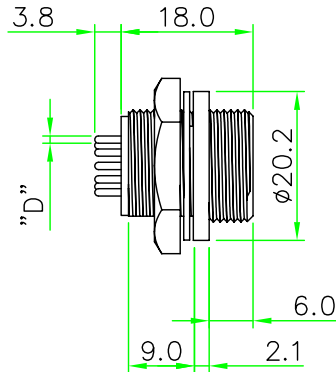

REV.	DESCRIPTION	DATE
A	ISSUE	Jul/16/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: CBx-P1xxCPF

- 02 - 2 PIN 07 - 7 PIN
- 03 - 3 PIN 08 - 8 PIN
- 04 - 4 PIN 10 - 10 PIN
- 05 - 5 PIN 12 - 12 PIN
- 06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

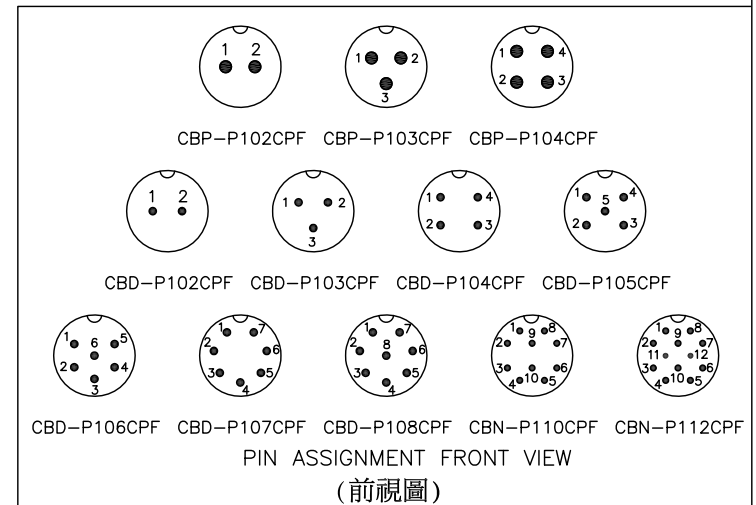


	UNIT: mm	TITLE : Circular B Size Male Connector Male Pin Screw Type Round Flange Front Panel Mount PCB Pin
SCALE	1:1	

UNLESS OTHERWISE  
SPECIFIED TOLERANCES:  
.x ± 0.25 .xx ± 0.1  
.xxx ± 0.05 ANGLE ± 1°  
REV. SHEET


P/N:	CBx-P1xxCPF	DR.	Patty
DWG.NO:	CBx-P1xxCPF	CH.	ERIC
		AP.	

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	NYLON+GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	B Size Male Connector Insert.NYLON+GF.	BLACK	1	


REV.	DESCRIPTION	DATE
A	ISSUE	Jul/16/2014




CBD-P102CPF




CBD-P103CPF




CBD-P104CPF




CBD-P105CPF




CBD-P106CPF




CBD-P107CPF

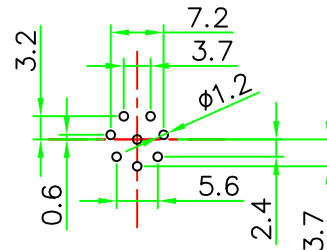


CBD-P108CPF




CBN-P110CPF




CBN-P112CPF



CBP-P102CPF




CBP-P103CPF



CBP-P104CPF

**HOLIN**® HTP ASIA TECHNOLOGY CO., LTD.  
禾凌科技股份有限公司

 <b>UNIT:</b> mm		<b>TITLE :</b> Circular B Size Male Connector Male Pin Screw Type Round Flange Front Panel Mount PCB Pin	
<b>SCALE</b> 1:1		<b>P/N:</b> CBx-P1xxCPF	<b>DR.</b> Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°			<b>CH.</b> ERIC
<b>REV.</b> A	<b>SHEET</b> 2/2	<b>DWG.NO:</b> CBx-P1xxCPF	<b>AP.</b>