
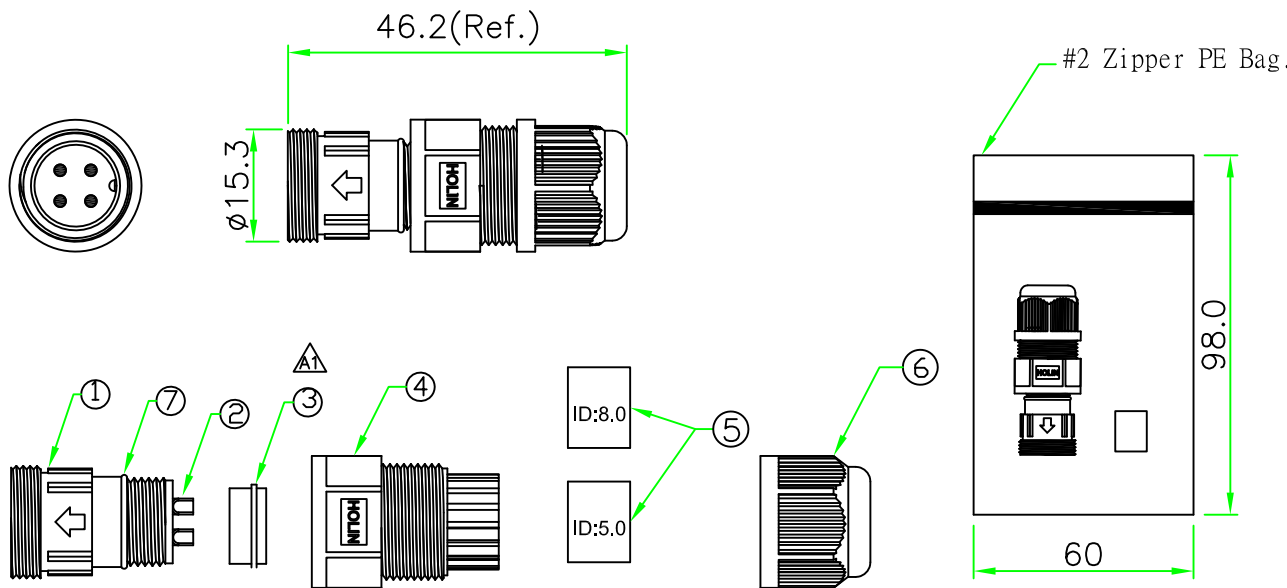


**RoHS**  
**IP66~68**



REV.	DESCRIPTION	DATE
A	ISSUE	Jan/07/2010
A1	Change ③Shape And Add Pin Assignment	Aug/29/2014


**NOTES:**

**1. ELECTRICAL CHARACTERISTICS:**

CURRENT RATING: 2A / 5A /10A  
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE

**2. HOW TO ORDER: CBx-P1xxSA**

- 02 - 2 PIN    07 - 7 PIN
- 03 - 3 PIN    08 - 8 PIN
- 04 - 4 PIN    10 - 10 PIN
- 05 - 5 PIN    12 - 12 PIN
- 06 - 6 PIN
- P - CURRENT RATING 10A
- D - CURRENT RATING 5A
- N - CURRENT RATING 2A

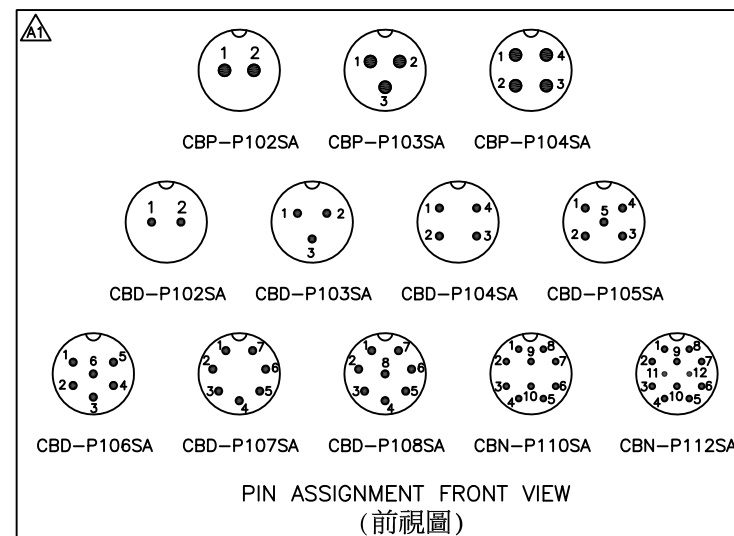

7	O-RING	NBR.	BLACK	1	
6	CLAMP NUT	NYLON+GF.	BLACK	1	
5	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
4	HOOD	NYLON	BLACK	1	
3	GASKET	RUBBER.	BLACK	1	
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		<b>TITLE :</b> Circular B Size Screw Type Male Connector Male Pin Field Installable Plug	
 <b>UNIT:</b> mm <b>SCALE:</b> 1:1	<b>P/N:</b> CBx-P1xxSA		
<b>UNLESS OTHERWISE SPECIFIED TOLERANCES:</b> .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1° REV. SHEET		<b>DWG.NO:</b> CBx-P1xxSA	<b>AP.</b>
A1	1/1		