

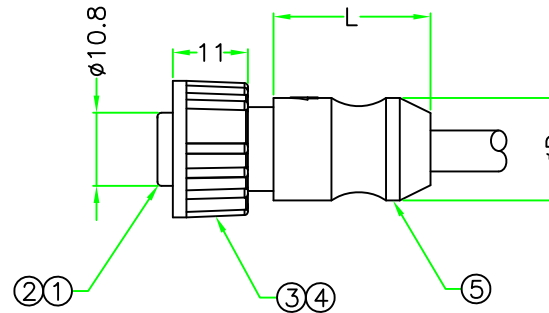

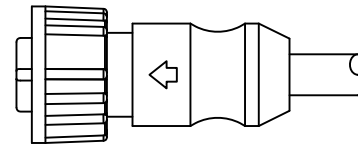


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	May/12/2006



OVERMOLD :
 22-135 : L=24.0 , D=Ø15.0
 98-135 : L=32.0 , D=Ø16.5

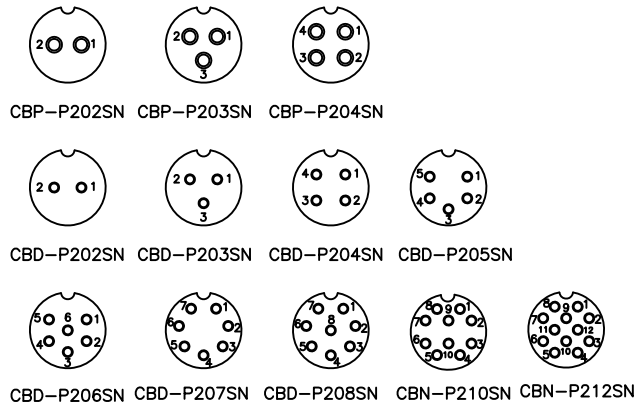

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV.	SHEET	DWG.NO:
5	OVERMOLD	PVC or PU	BLACK	1	22-135-Nx 98-135-Nx	A	1/1	CBx-P2xxSN
4	SCREW NUT	NYLON+GF	BLACK	1	B-SN (48-135)	A	1/1	CBx-P2xxSN
3	O-RING	NBR	BLACK	1		A	1/1	CBx-P2xxSN
2	CONTACT	Brass, Female Pin , 6u" Gold Plating.		N		A	1/1	CBx-P2xxSN
1	CONNECTOR	Female Connector Insert, NYLON+GF.	BLACK	1	20-135-Nx	A	1/1	CBx-P2xxSN
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1	CBx-P2xxSN



UNIT: mm
 SCALE 1:1
 TITLE : CIRCULAR B SIZE SCREW TYPE MOLDED CABLE
 P/N: CBx-P2xxSN
 DWG.NO: CBx-P2xxSN
 DR. Jack
 CH. ERJE
 AP.

UNLESS OTHERWISE SPECIFIED TOLERANCES:
 x ±0.25 xx ±0.1
 xxx ±0.05 ANGLE ± 1°X