
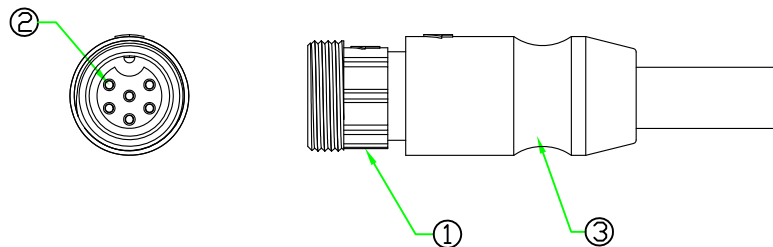



RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/20/2015

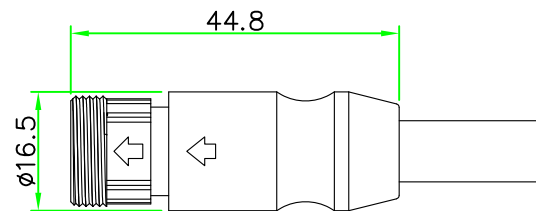

Ref.

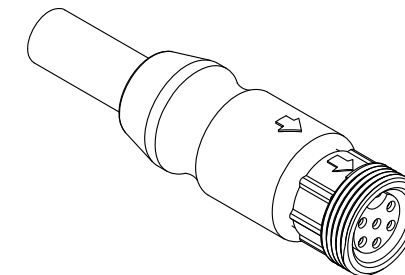


NOTES:

- ELECTRICAL CHARACTERISTICS:  
 CURRENT RATING: 5A / 10A  
 CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V AC FOR ONE MINUTE
- HOW TO ORDER: CBx-P3xxSN

- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN

- P - CURRENT RATING 10A
- D - CURRENT RATING 5A

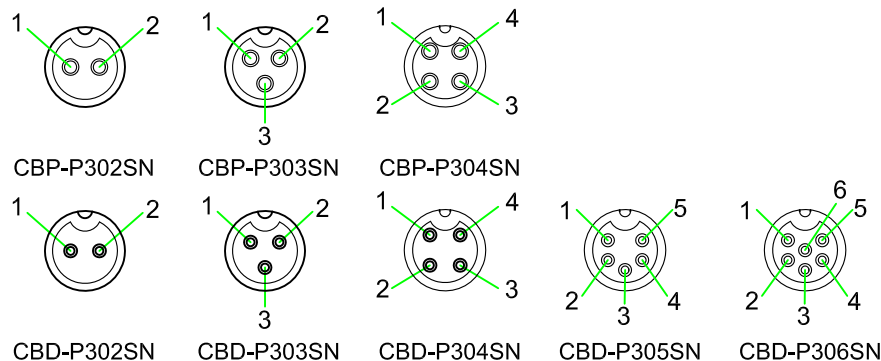

PIN ASSIGNMENT FRONT VIEW  
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm SCALE 1:1 TITLE : Circular B Size Screw Type Male Connector Female Pin Molded Cable
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx ± 0.05 ANGLE ± 1°	P/N: CBx-P3xxSN DR. Patty CH. ERIC
REV. A SHEET 1/1	DWG.NO: CBx-P3xxSN AP.