
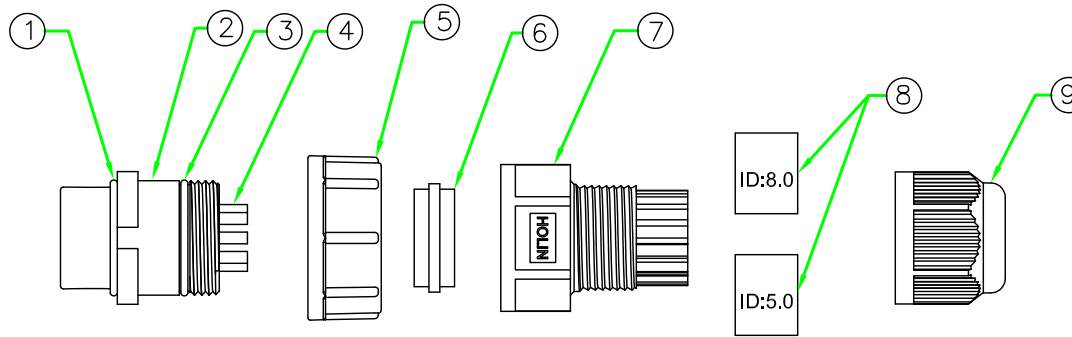

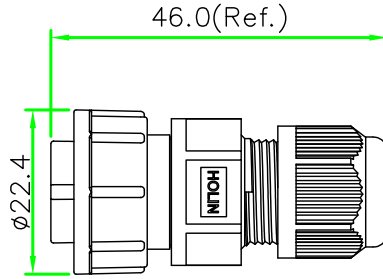



RoHS

IP66~68



ID:8.0

ID:5.0

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/24/2015

NOTES:



- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 5A / 10A / 20A  
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE

2. HOW TO ORDER: CCx-L4xxSA


- 03 - 3 PIN
- 05 - 5 PIN
- 09 - 9 PIN

- D - CURRENT RATING 5A
- P - CURRENT RATING 10A
- G - CURRENT RATING 20A


#2 Zipper PE Bag.

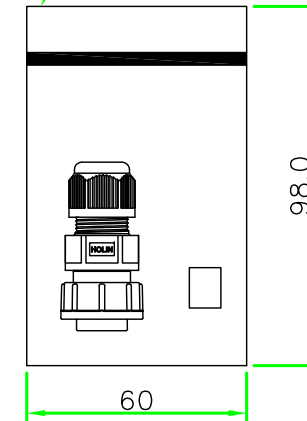

CCG-L403SA



CCP-L405SA



CCD-L409SA

PIN ASSIGNMENT FRONT VIEW  
(前視圖)

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	Rubber ( ID= 5.0 & 8.0mm)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	Rubber	BLACK	1	
5	LOCK NUT	NYLON+GF.	BLACK	1	
4	CONTACT	Brass ,Male Pin. 6u"Gold Plated.		N	
3	O-RING	NBR.	BLACK	1	
2	CONNECTOR	C Size Female Connector Insert, NYLON+GF.	BLACK	1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

UNIT: mm  
SCALE 1:1

UNLESS OTHERWISE SPECIFIED TOLERANCES:  
.x ± 0.5 .xx ± 0.25  
.xxx ± 0.1 ANGLE ± 1'  
REV. SHEET

A 1/1



TITLE : Circular C Size Lock Type  
Female connector Male Pin  
Field Installable Plug

P/N: CCx-L4xxSA

DWG.NO: CCx-L4xxSA

DR. Patty  
CH. ERIC  
AP.