



REV.	DESCRIPTION	DATE
A	ISSUE	Apr/04/2012

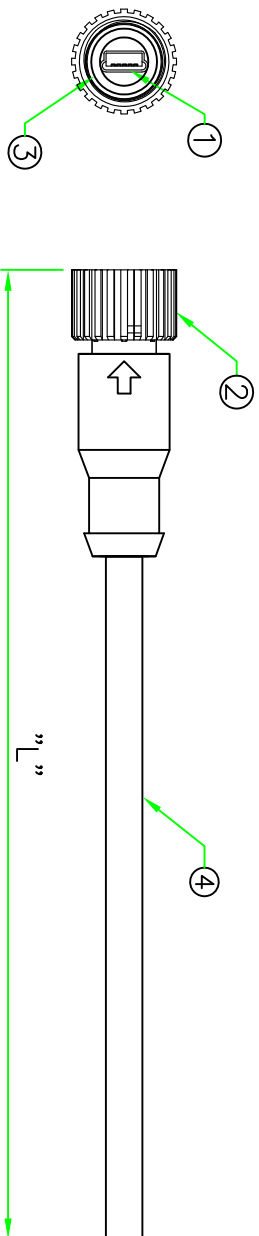

RoHS

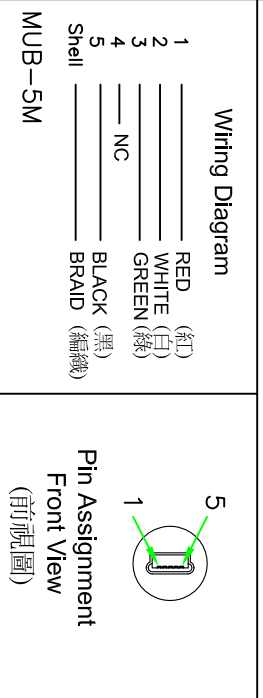

No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS
4	CABLE	USB 2.0 28AWGX2C+20AWGX2C, Jacket Black PVC, OD: 5.2mm.	BLACK	1	
3	O-RING	NBR.	BLACK	1	O-5516-N70
2	RING NUT	NYLON+GF.	BLACK	1	M12F-PN (70-135-N8)
1	CONNECTOR	MINI USB B TYPE MALE 5 Pin Connector.	BLACK	1	

- Specification:
1. Current rating : 1A Max.
 2. Dielectric withstanding voltage : 500V(AC) for 1 minute.
 3. Contact resistance : 30mW Max.
 4. Insulation resistance : 1000MW Min. at DC 500V.
 5. Temperature range : -20°C ~ +80°C.
 6. IP rate : IP 66 ~ IP68.

- HOW TO ORDER:
- MUB-□4□□-xxM
1 2345 6
- 1- Mini USB B Type
 - 2- M: Metal Ring Nut.
 - P: Plastic Ring Nut.
 - 3- 4: Female Connector Male Plug.
 - 4- S: Straight Angle. R: Right Angle.
 - 5- N: w/o SR. M: w/SR.
 - 6- Length. (01M=1M,.....)



SCALE	UNIT: mm	TITLE
1:1	1:1	Mini USB B 5M S/T Molded cable
<p>UNLESS OTHERWISE SPECIFIED TOLERANCES:</p> <p>XXX ±0.25 XX ±0.1 XXX ±0.05 ANGLE ±1°X</p>		
REV: A	SHEET 1/1	DWG. NO: MUB-P4SN-xxM
		DR. jacx CH. E.R.JE AP.