
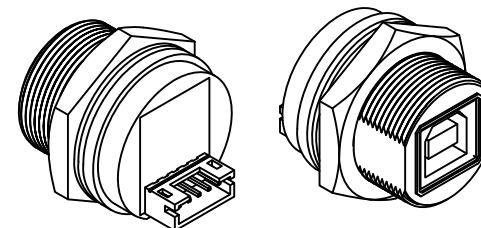
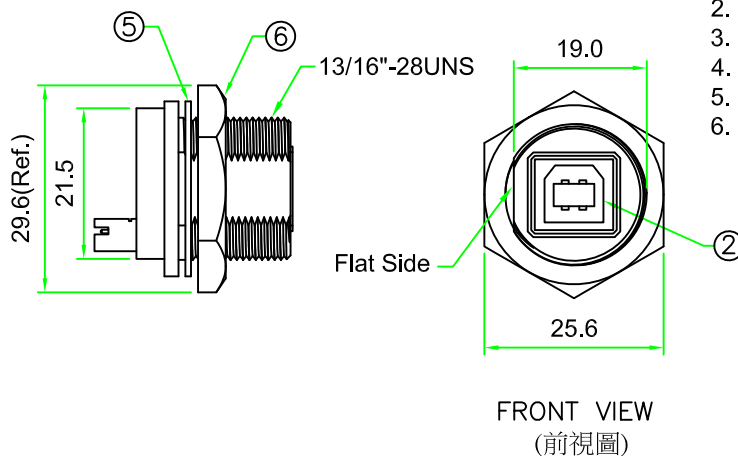
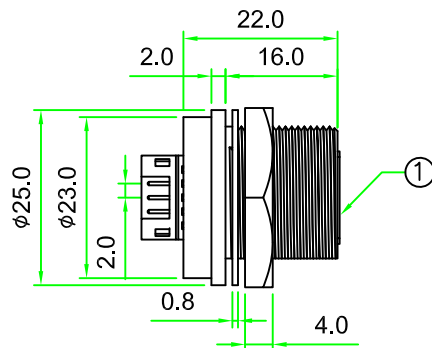
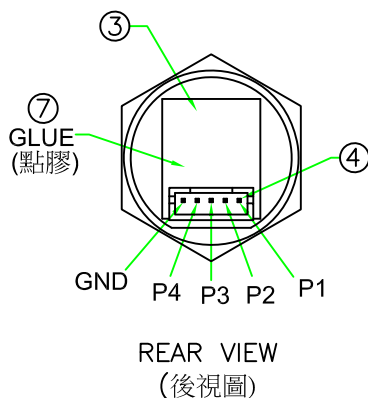



RECOMMENDED
PANEL CUT OUT

RoHS

IP66~68



NOTES:

1. Current Rating: 1A
2. Connector Temperature Range: -25°C to 85°C
3. Contact Resistance: $\leq 30\text{m}\Omega$
4. Insulation Resistance: $\geq 100\text{M}\Omega$
5. Breakdown Voltage: $\geq \text{AC } 500\text{V}/1 \text{ Minute}$
6. Panel Thickness Max. 4.0 mm

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
7	GLUE	EPOXY.	BLACK		
6	HEX NUT	NYLON+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	WAFER	PITCH 2.0mm, Straight Angle. 5P*1ROW.		1	
3	PCB	FR4 . Double Side, 1.0mm Thickness.		1	
2	CONNECTOR	USB B Type Female Connector.		1	
1	BODY	USB B Type Lock Type Female Connector Insert. NYLON+GF.	BLACK	1	

UNIT: mm		TITLE :	
SCALE	1:1	USB 2.0 B Type Female C Size Lock Type Circular Flange Panel 5 Pin Straight Angle Wafer	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N:	DR. SIBYL
REV. A	SHEET 1/1	USB2BC-P3C03	CH. JAMES
		DWG.NO:	AP.
		USB2BC-P3C03	