







REV.	DESCRIPTION	DATE
A	ISSUE	Sep/24/2015
A1	Correct pin assignment drawing	Oct/14/2015
B	Correct overmold length.	Aug/29/2016

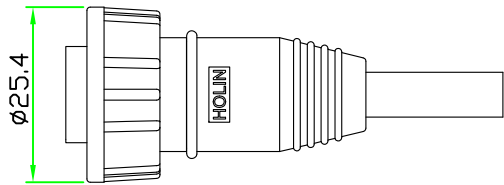


HDMIAC-P4SN
(IP66)

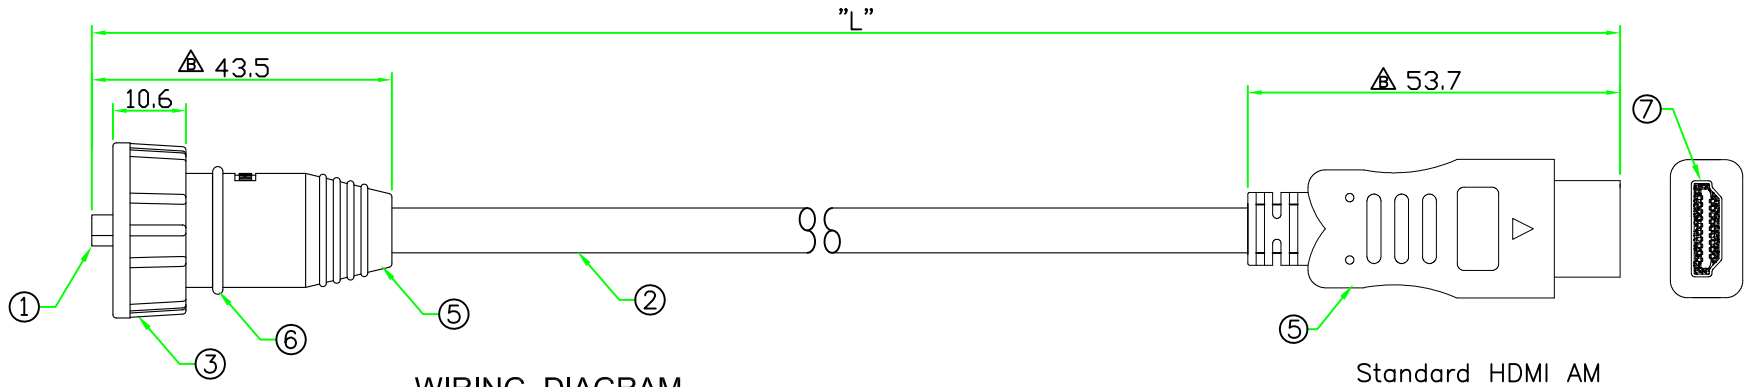

WIRING DIAGRAM

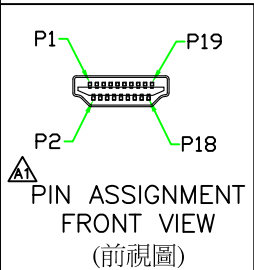


HDMI A 19M

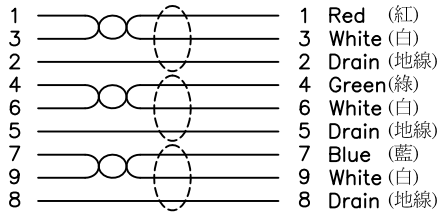

HDMI A 19M

HDMI A 19M

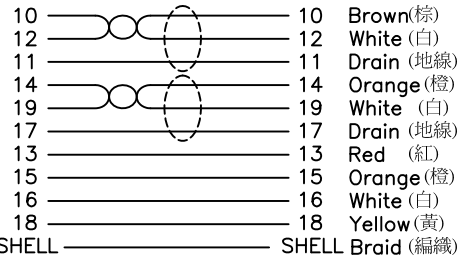

HDMI A 19M

Standard HDMI AM

P/N	L
WHDMIAC-PB-2M	2000±100
WHDMIAC-PB-5M	5000±200

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
7	CONNECTOR	HDMI A 19P MALE SOLDER CONNECTOR. 15u" Gold Plating.		1	
6	O-RING	EPDM.	BLACK	1	
5	OVER MOLDED	PVC	BLACK	2	
4	GASKET	RUBBER	BLACK	1	
3	SCREW NUT	NYLON+GF.	BLACK	1	
2	CABLE	UL20276 (30AWGx1P+D)x5C + 30AWGx4C + AI/My+Braid OD: 6.5mm	BLACK	1	
1	CONNECTOR	HDMI A 19P Male solder connector. Gold flash.		1	

TITLE : HDMI A Type 19P Male
Waterproof to Standard Molded Cable

SCALE : 1:1

UNIT: mm

P/N: WHDMIAC-PB-xxM

DR. JACK

CH. ERIC

DWG.NO: WHDMIAC-PB-xxM

AP.

UNLESS OTHERWISE SPECIFIED TOLERANCES:
 .x ± 0.5 .xx ± 0.25
 .xxx ± 0.1 ANGLE ± 1°

REV. B SHEET 1/1