


PIN HEADER DIP SINGLE ROW

12 SERIES. 2.54MM PITCH



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

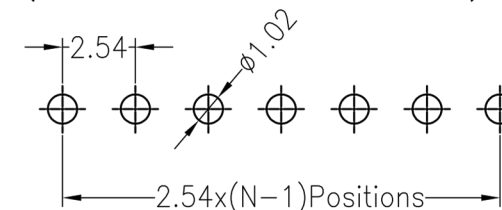

Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PA6T
- Max. Processing Temp : 230° for 30-60 seconds
260° for 5 seconds

Ordering Information

12(H)D - 11 (XX) - AAA - B C P (1)

1. Connector Series

2. (H) Hauteur isolant

- H = 10 (Hauteur isolant : 1.0mm)
- H = 15 (Hauteur isolant : 1.5mm)
- H = 17 (Hauteur isolant : 1.7mm)
- H = 20 (Hauteur isolant : 2.0mm)
- H = 25 (Hauteur isolant : 2.5mm)

3. Number of pins per row

4. Pin Length

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating





- A = Gold Flash
 - B = 5U" Gold
 - C = 10U" Gold
 - D = 15U" Gold
 - E = 30U" Gold
 - F = Gold Flash/Tin
 - G = Tin
 - H = 3U" Gold*
- *Seulement pour "1217D"

7. Post

- W (With Post)
- Ø (No Post)

(1). Packaging

Ø = PE Bag 1= Tray 2= Tube

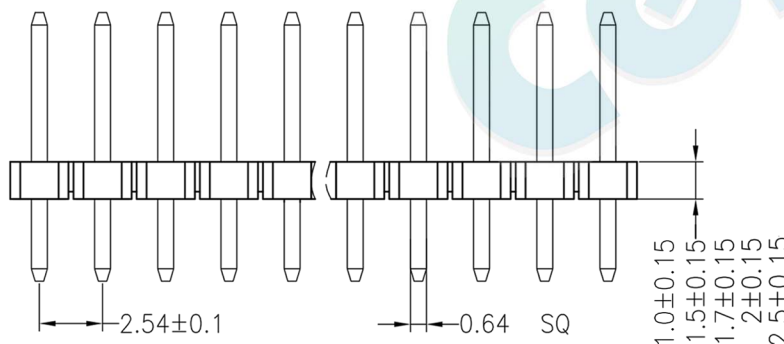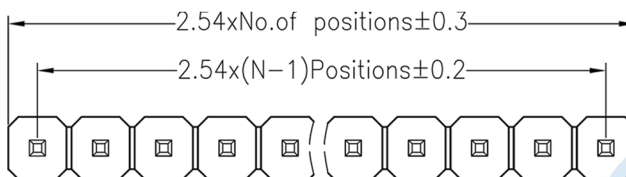

Dimension	antitheses list 1210		
ITEM	PA	PC	L
Standard	6.00	3.00	10.0
Alternate			

Dimension	antitheses list 1215		
ITEM	PA	PC	L
Standard	6.00	3.00	10.5
Alternate			

Dimension	antitheses list 1217		
ITEM	PA	PC	L
Standard	6.00	3.00	10.7
Alternate			

Dimension	antitheses list 1220		
ITEM	PA	PC	L
Standard	6.00	3.00	11.0
Alternate			

Dimension	antitheses list 1225		
ITEM	PA	PC	L
Standard	6.00	3.00	11.5
Alternate			

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

YiYuSheng

12.07.02

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.



CHECK

APPROVE



PART NO.

12XXD - 11XX - XXX - XXX (1)

TITLE:

2.54mm Pin Header Single 180°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.02	NEW DRAWING	