

FEMALE HEADER DIP DUAL ROW


22 SERIES - 2.54MM PITCH



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PBT
- Max. Processing Temp : 180° for 30-60 seconds
200° for 10 seconds

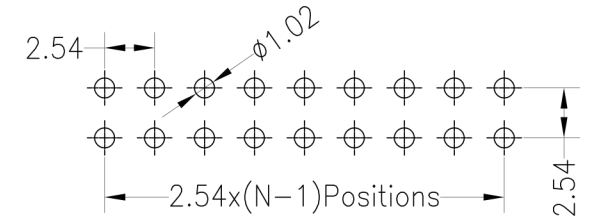

Ordering Information

2211D - 2 Y (XX) - A B C (1) 01*

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 11 (Hauteur isolant : 11.0mm)

3. Y-Type

4. Number of pins per row

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-PA9T
- F = BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 1.5U" Gold
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = Gold Flash/Tin
- G = Tin





7. Post

- W (With Post)
- Ø (No Post)

(01) = Type 1

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Tube+Cap 4=Reel+Cap 5=Reel+Mylar

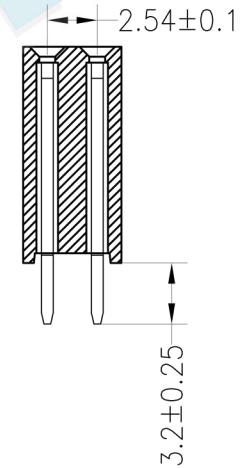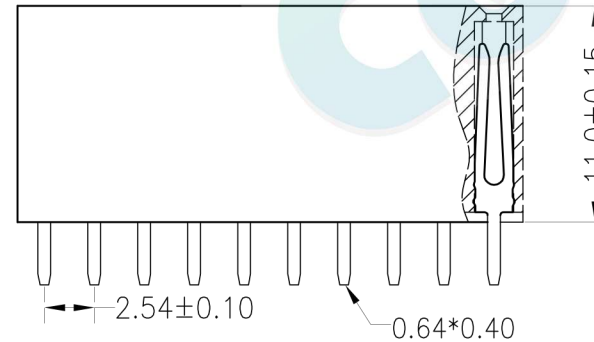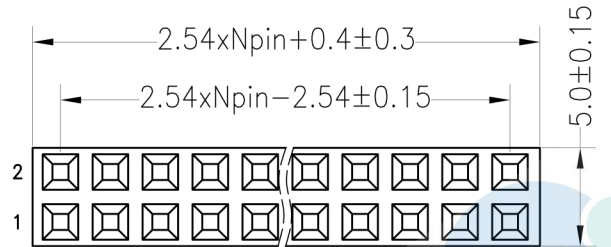

OPERATION		DRAW	BEN	12.04.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL					
		PROJ.			◆	



A0	2012.04.18	NEW DRAWING						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE					

PART NO.	2211D - 2YXX - XXX 01
TITLE:	2.54PF H11.0mm 2xNpin 180° W5.0mm

FEMALE HEADER DIP DUAL ROW


22 SERIES - 2.54MM PITCH



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Specifications

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Resistance: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact Plating : Au Or Sn Over Ni
- Insulator Material : Polyester (UL94V-0)
- Standard : PBT
- Max. Processing Temp : 180° for 30-60 seconds
200° for 10 seconds

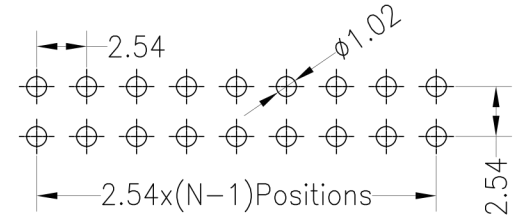

Ordering Information

2211D - 2 Y (XX) - A B C (1) 02*

1 2 3 4 5 6 7

1. Connector Series

2. (H) Hauteur isolant

- H = 11 (Hauteur isolant : 11.0mm)

3. Y-Type

4. Number of pins per row

5. Insulator Material Option

- A = BK-PBT
- B = BK-PA66
- C = BK-PA6T
- D = BK-PA46
- E = BK-LCP

6. Contact Plating

- A = Gold Flash
- B = 1.5U" Gold
- C = 2U" Gold
- D = 3U" Gold
- E = 5U" Gold
- F = Gold Flash/Tin
- G = Tin





7. Post

- W (With Post)
- Ø (No Post)

(02) = Type 2

(1). Packaging

Ø=PE Bag 1=Tray 2=Tube 3=Pe 4=Tape&Reel 5=Tube&Reel

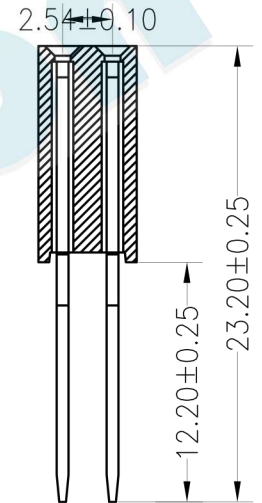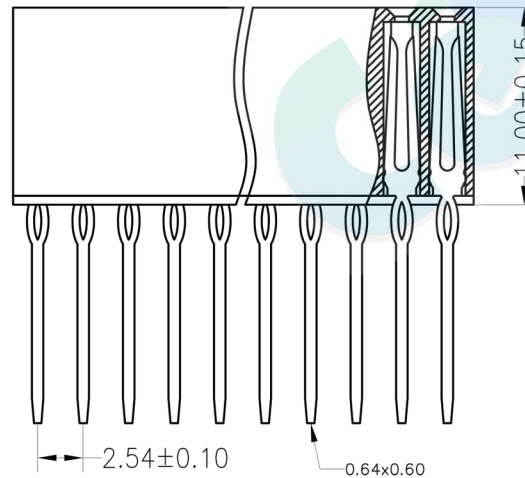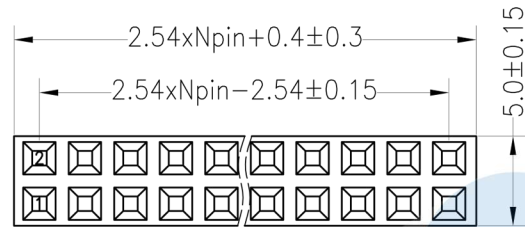

OPERATION		DRAW	BEN	12.04.18	SCALE	FIT	 votre partenaire en électronique	
X.X	±0.30							
X.XX	±0.20	CHECK			UNIT	mm	PART NO.	2211D - 2YXX - XXX 02
X.XXX	±0.10							
Angle	±3°	APPROVE			SIZE	A4	TITLE:	2.54PF H11.0mm 2xNpin 180° W5.0mm
DIM	TOL							
PROJ.					SHEET	1/1		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	